1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

CPD Wheel Diameter x Wheel Width 150 x 40mm

EAN

KS-11420600294051

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 6 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 9/16 " x 7/8 "

 Offset
 1-11/16 "

 Swivel Interference
 12-11/16 "

 Overall Height
 7-7/8 "

 Swivel Radius
 6-3/8 "

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Front Brake

72±5° Shore D

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.2lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • 0

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

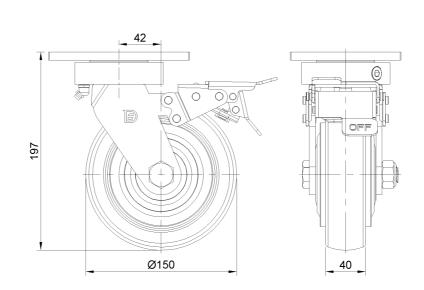

Mounting

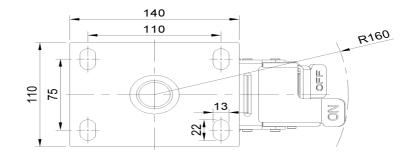

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.