1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11420600544151

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 042mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 13 x 22mm Offset 42mm 320mm Swivel Interference Overall Height 197mm **Swivel Radius** 160mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

92±5 Shore A

670kgs

1005kgs

-20°C to +70°C

Fork Type Swivel Caster With Front Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight5.34kgsStandardISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


•••••

Floor Surface Preservation • • • • •

Dimensions

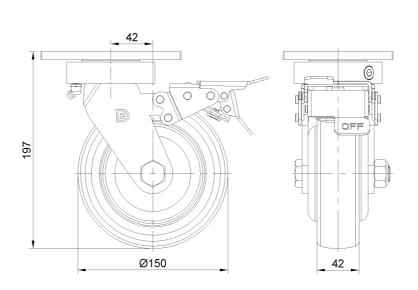

Mounting

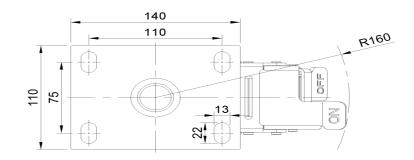

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.