# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11420600544151

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 9/16 " x 7/8 "

 Offset
 1-11/16 "

 Swivel Interference
 12-11/16 "

 Overall Height
 7-7/8 "

 Swivel Radius
 6-3/8 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1477lbs

Load Capacity (Static) 2216lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 11.8lbs

Standard ISO22883

#### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

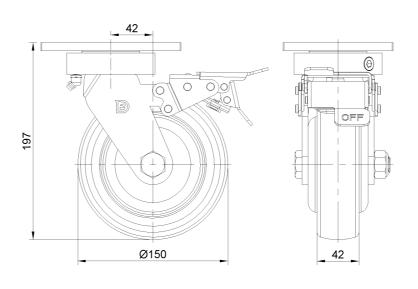

## Mounting

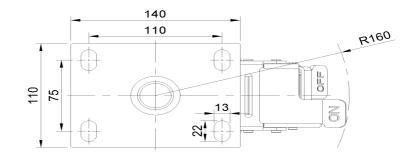

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.