1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

ZQPU (brown round) Wheel Diameter x Wheel Width 125 x 24 (51) mm

EAN

KS-11420600802021

Swivel Casters, Welded Caster Fork Surface sprayed with blue paint, Top Plate installation device, Hole spacing 85x70 Wheel core made of cast iron, high quality polyurethane Wheel Tread, Cast Iron brown Bearing—special Ball Bearings to reduce Rolling Resistance ZQPU double wheels, Ergonomic design, easier to start and turn

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 24mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 22 x 13mm Offset 42mm **Swivel Interference** 240mm Overall Height 197mm **Swivel Radius** 120mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 550kgs

Load Capacity (Static) 825kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.66kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

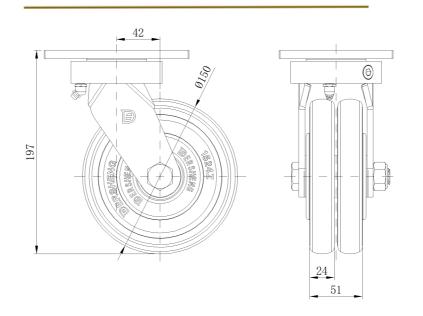

Mounting

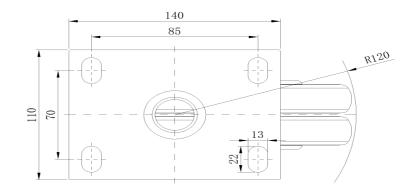

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.