



1142 Kingpinless Caster (B Type) Series

Non-marking NBR Rubber (milling) Wheel Diameter x Wheel Width 200 x 44mm


EAN

KS-11420800042121

Swivel Casters, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 110x75 Cast Iron Wheel Center, High-Quality high-Resilient Rubber Wheel Tread, Cast Iron original color Bearing—Ball Bearing, with special Anti-thread wheel covers

Wheel Tread: Made of high quality and high elastic rubber  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

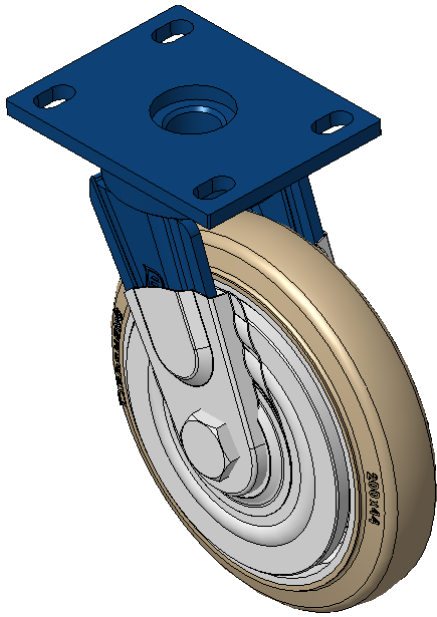

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 8 "                       |
| Wheel Width                                                            | 1-3/4 "                   |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 5-9/16 " x 4-3/8 "        |
| Bolt Hole Spacing                                                      | 4-5/16 " x3"              |
| Plate Hole                                                             | 7/8 " x 9/16 "            |
| Offset                                                                 | 1-7/8 "                   |
| Swivel Interference                                                    | 12 "                      |
| Overall Height                                                         | 9-15/16 "                 |
| Swivel Radius                                                          | 6 "                       |
| Hardness Of Tread                                                      | 85±5° Shore A             |
| Load Capacity (Dynamic)                                                | 772lbs                    |
| Load Capacity (Static)                                                 | 1157lbs                   |
| Temperature                                                            | -4°F to +176°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 12.7lbs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

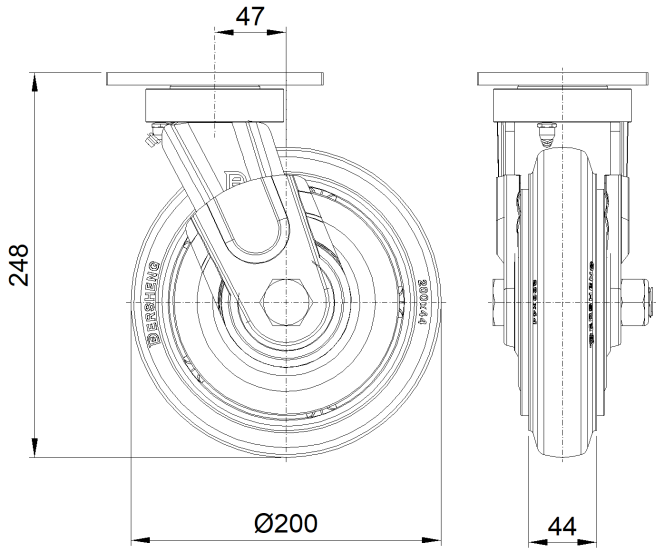

Mounting

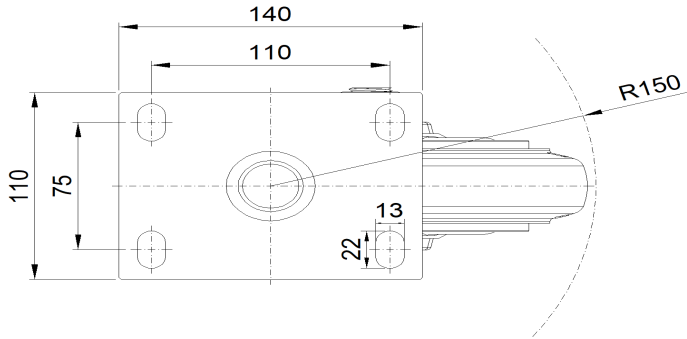

\* For any deviation between metric and imperial spec, please refer to the metric spec.