1142 Kingpinless Caster (B Type) Series

Triz rangpinioco cactor (B Typo) cono

CPD Wheel Diameter x Wheel Width 200 x 50mm

EAN

KS-11420800292021

Swivel Caster with Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 050mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 13 x 22mm Offset 47mm 300mm Swivel Interference Overall Height 248mm **Swivel Radius** 150mm Hardness Of Tread 72±5° Shore D Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.34kgs

ISO22883

Standard


Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation • • • • • •

Dimensions

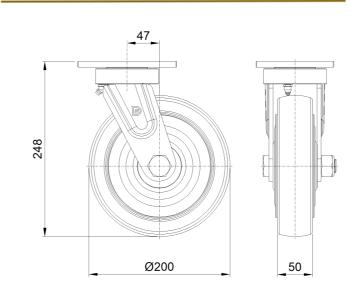

Mounting

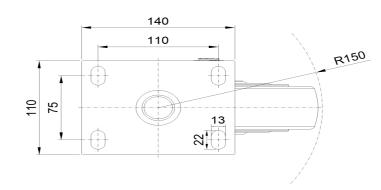

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.