1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

VQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11420800542121

Swivel Caster, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 110x75 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing—Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm Offset 47mm 300mm Swivel Interference Overall Height 248mm **Swivel Radius** 150mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 800kgs

Load Capacity (Static)

Temperature

-20°C to +70°C

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.39kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions



Mounting

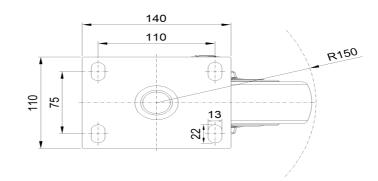

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.