# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

ZQPU (brown round) Wheel Diameter x Wheel Width 200 x 24 (51) mm


EAN

KS-11420800802021

Swivel Casters, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 110x75 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing—Ball Bearing, reducing Rolling Resistance ZQPU double wheels, Ergonomic design, easier to start and turn

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 51mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 22 x 13mm 47mm Offset 300mm **Swivel Interference** Overall Height 248mm **Swivel Radius** 150mm Hardness Of Tread 92±5° Shore A Load Capacity (Dynamic) 650kgs

Load Capacity (Dynamic) 650kgs

Load Capacity (Static) 975kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.28kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

### Dimensions

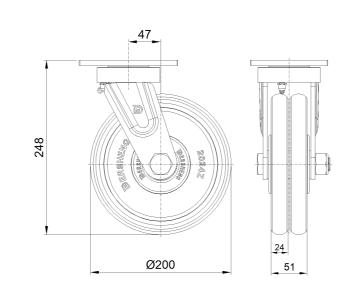

## Mounting

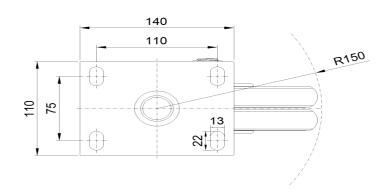

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.