



1146 46 Ascendant Series Caster Series(All Plastic)


Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN  
KS-11460300452063

Adjustable Casters, 32x32mm Bolt Hole Spacing on the Top Plate  
Black Casters made of polypropylene reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Black, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

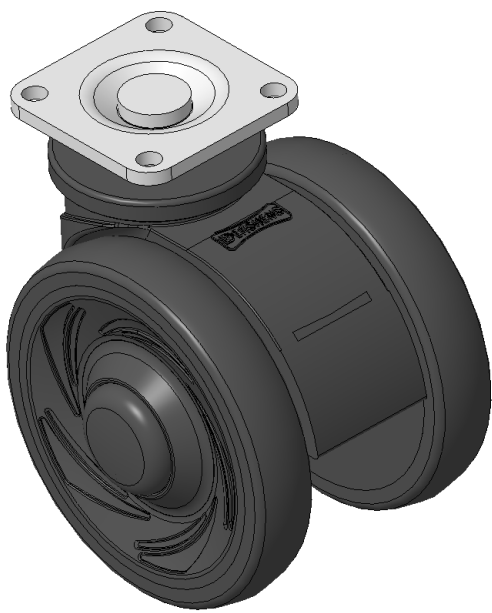

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 3 "                       |
| Wheel Width                                                            | 2-7/16 "                  |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 1-5/8 " x 1-5/8 "         |
| Bolt Hole Spacing                                                      | 1-1/4"x1-1/4"             |
| Plate Hole                                                             | 3/8 " x 1/4 "             |
| Offset                                                                 | 15/16 "                   |
| Swivel Interference                                                    | 5-3/8 "                   |
| Overall Height                                                         | 3-3/8 "                   |
| Swivel Radius                                                          | 2-11/16 "                 |
| Hardness Of Tread                                                      | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                | 198lbs                    |
| Load Capacity (Static)                                                 | 298lbs                    |
| Temperature                                                            | -4°F to +140°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.6lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

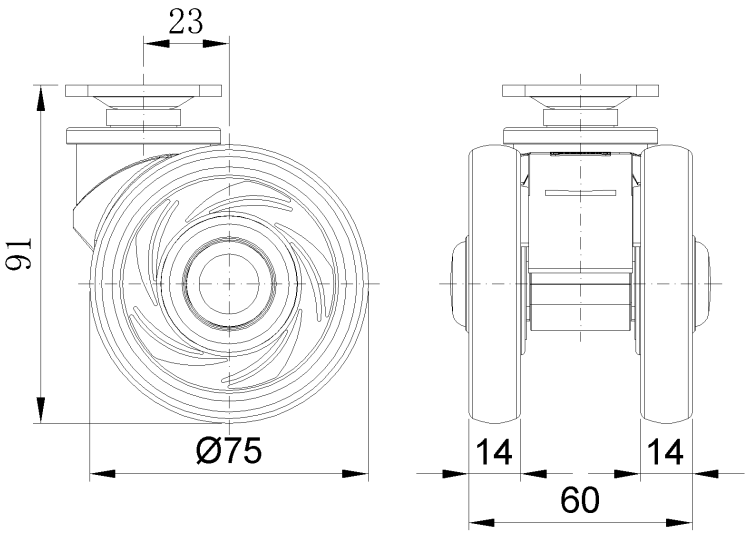

Mounting

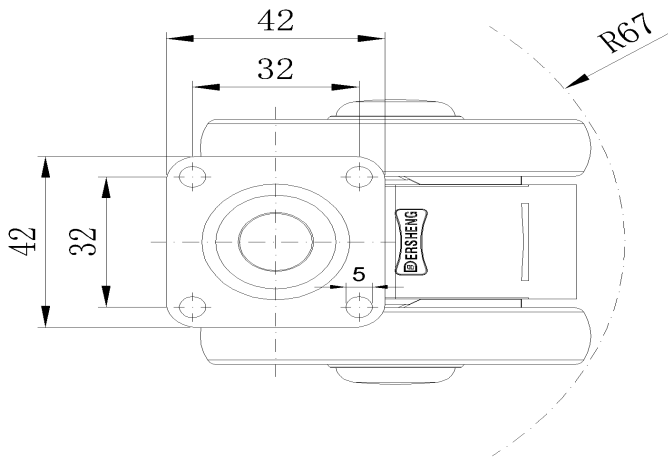

\* For any deviation between metric and imperial spec, please refer to the metric spec.