1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN

KS-11460300454143

Short Total Brake Casters, 32x32 angled perforated Top Plate

Black Caster Fork made of polypropylene reinforced material

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Black, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Swivel Radius

Wheel Diameter 75mm Wheel Width 60mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 42 x 42mm **Bolt Hole Spacing** 32x32mm Plate Hole 5mm Offset 23mm Swivel Interference 179mm Overall Height 91mm

72±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 90kgs 135kgs Load Capacity (Static)

-20°C to +60°C Temperature

Fork Type Swivel Caster With Total Brake

89.5mm

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.34kgs Standard ISO22881


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions



Mounting

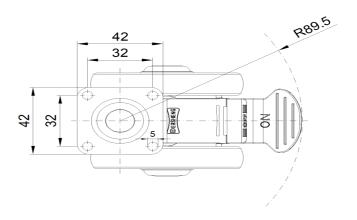

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.