## 1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN

KS-11460300455313

Adjustable Casters, Threaded Stem M10x17

Black Casters made of polypropylene reinforced material

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Black, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 2-7/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M10

Threaded Length 11/16 "

Offset 15/16 "

Swivel Interference 5-3/8 "

Overall Height 3-3/8 "

Swivel Radius 2-11/16 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.6lbs

Standard


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

## Dimensions

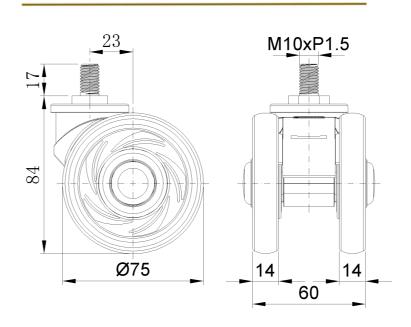





<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883