1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel(all dark gray) Wheel Diameter x Wheel Width 75 x 14mm

EAN

KS-11460300459443

Short Total Brake Casters, Single Bolthole polyamide legs—hollow $\emptyset 10.5$

Dark gray legs made of polyamide reinforcement

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 75mm
Wheel Width 60mm

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 10.5mm

Offset 23mm

Swivel Interference 179mm

Overall Height 81mm

Swivel Radius 89.5mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.28kgs

Standard ISO22881

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

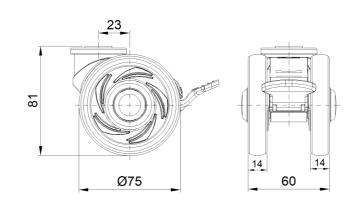

Mounting



 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.