1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel(all dark gray) Wheel Diameter x Wheel Width 75 x 14mm

EAN

KS-11460300459443

Short Total Brake Casters, Single Bolthole polyamide legs—hollow $\emptyset 10.5$

Dark gray legs made of polyamide reinforcement

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 3 "

Wheel Width 2-7/16 "

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole

15/16 "

3/8 "

7-1/16 "

3-1/4 "

3-9/16 "

Offset

Swivel Interference

Overall Height

Swivel Radius

Hardness Of Tread

72±5° Shore A

Load Capacity (Dynamic)

198lbs

298lbs

Load Capacity (Static)

-4°F to +140°F

Fork Type

Temperature

-41 10 1140 1

Swivel Caster With Total Brake

Stainless

N/A

N/A

N/A

Electrical Conductivity

Anti-Static

Weight 0.6lbs

Standard

ard ISO22881

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

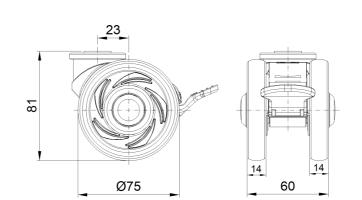

Mounting



 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.