1146 46 Ascendant Series Caster Series(All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 75x 14mm

EAN

KS-11460391452013

Swivel Casters, 42.5x42.5mm angled perforated Top Plate

White legs made of polyamide reinforced material

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

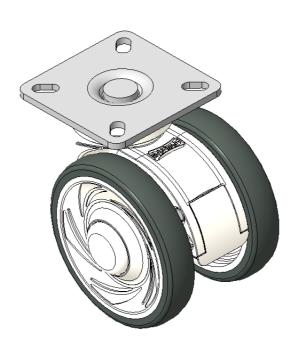

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Swivel Interference

Standard

3 " Wheel Diameter

2-7/16" Wheel Width

Wheel Bearing Wheels With Ball Bearings

2-7/16" x 2-7/16" Plate Size **Bolt Hole Spacing** 1-11/16"x1-11/16"

3/8 " x 1/4 " Plate Hole Offset 15/16 " 5-3/8 "

3-3/8 " Overall Height 2-11/16 " **Swivel Radius**

72±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 198lbs Load Capacity (Static) 298lbs

-4°F to +140°F Temperature Fork Type Swivel Caster

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A 0.7lbs Weight


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • •

Dimensions





Mounting

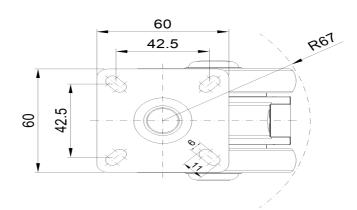

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22881