

1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 75x 14mm


EAN

KS-11460391452023

Adjustable Casters, 32x32 angled perforated Top Plate  
White legs made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

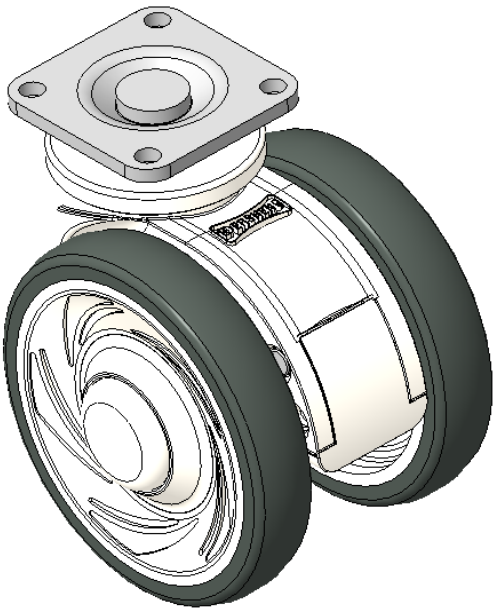

Picture may differ from original product

Technical Data


☒ Metric ☐ Imperial

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 75mm                      |
| Wheel Width             | 60mm                      |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 42 x 42mm                 |
| Bolt Hole Spacing       | 32x32mm                   |
| Plate Hole              | 5mm                       |
| Offset                  | 23mm                      |
| Swivel Interference     | 134mm                     |
| Overall Height          | 91mm                      |
| Swivel Radius           | 67mm                      |
| Hardness Of Tread       | 72±5° Shore A             |
| Load Capacity (Dynamic) | 90kgs                     |
| Load Capacity (Static)  | 135kgs                    |
| Temperature             | -20°C to +60°C            |
| Fork Type               | Swivel Caster             |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 0.27kgs                   |
| Standard                | ISO22881                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

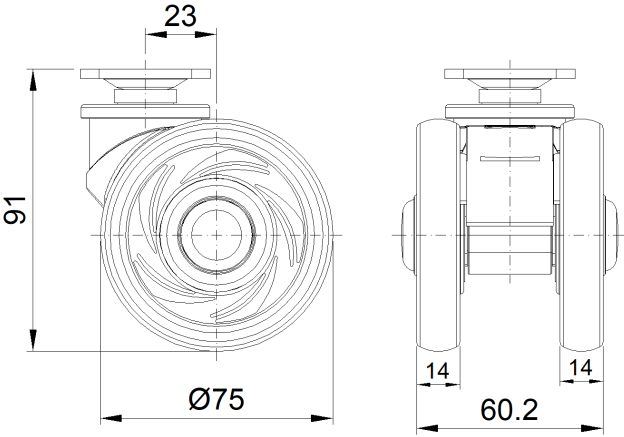

Mounting

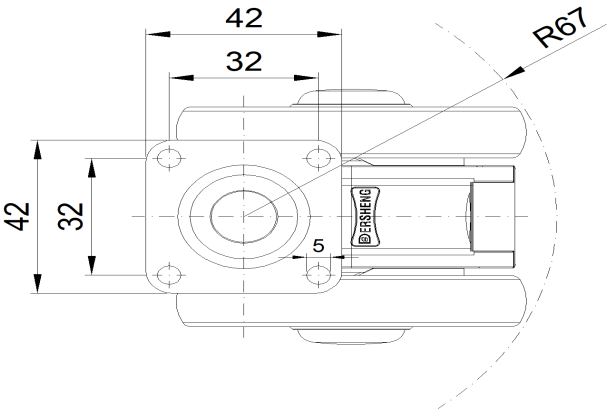

\* For any deviation between metric and imperial spec, please refer to the metric spec.