1146 46 Ascendant Series Caster Series(All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 75x 14mm

EAN

KS-11460391454023

Short Total Brake Casters, 32x32 angled hole Top Plate
White legs made of polyamide reinforced material
Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium-sized trolleys
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

Polypropylene Rubber (TPR) Wheel Tread White and dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric O Imperial

Wheel Diameter 75mm
Wheel Width 60mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 42 x 42mm

Bolt Hole Spacing 32x32mm

Plate Hole 5mm

Offset 23mm

Swivel Interference 134mm

Overall Height 90mm

Swivel Radius 67mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight0.28kgs

Standard ISO22881

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

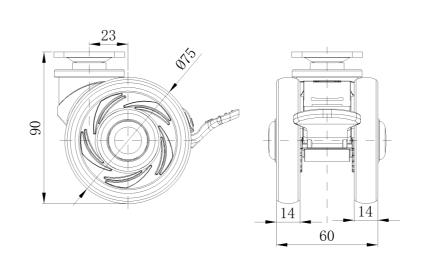

Mounting

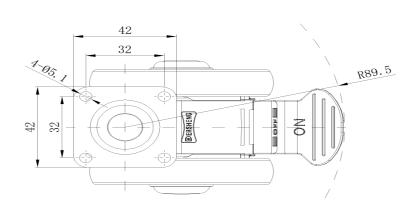

st For any deviation between metric and imperial spec, please refer to the metric spec.