1146 46 Ascendant Series Caster Series(All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN

KS-11460391454123

Short Total Brake Casters, 42.5x42.5mm angled hole Top Plate Black legs made of polyamide reinforced material Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium-duty High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced

Polypropylene Rubber (TPR) Wheel Tread

Black, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Temperature

● Imperial ○ Metric

3 " Wheel Diameter 2-7/16" Wheel Width

Wheel Bearing Wheels With Ball Bearings

2-7/16 " x 2-7/16 " Plate Size **Bolt Hole Spacing** 1-11/16"x1-11/16" 3/8 " x 1/4 " Plate Hole 15/16 " Offset

7-1/16 " Swivel Interference 3-9/16 " Overall Height 3-9/16 " **Swivel Radius** Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 0.7lbs ISO22881 Standard


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

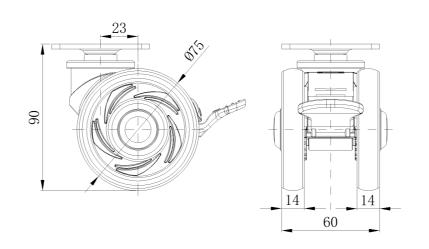

Mounting

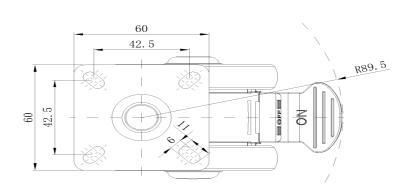

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.