



1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN


KS-11460391454143

Short Total Brake Casters, 32x32 angled hole Top Plate
Black legs made of polyamide reinforced material
Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium-duty trolleys
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
Black, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

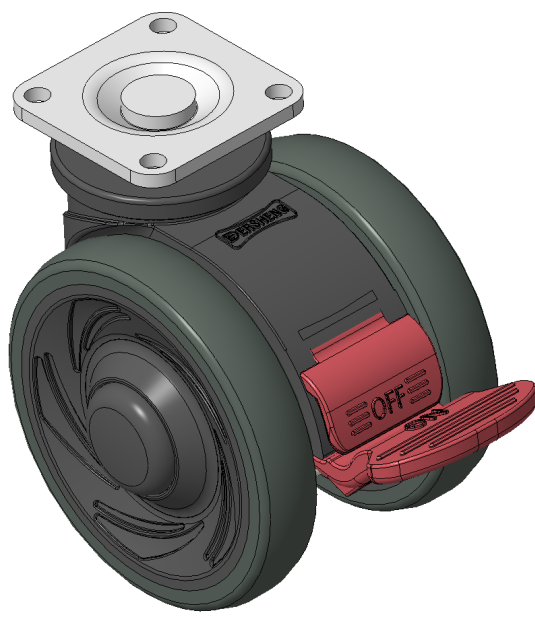

Picture may differ from original product

Technical Data

☒ Metric ☐ Imperial

Wheel Diameter	75mm
Wheel Width	60mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	42 x 42mm
Bolt Hole Spacing	32x32mm
Plate Hole	5mm
Offset	23mm
Swivel Interference	179mm
Overall Height	90mm
Swivel Radius	89.5mm
Hardness Of Tread	72±5° Shore A
Load Capacity (Dynamic)	90kgs
Load Capacity (Static)	135kgs
Temperature	-20°C to +60°C
Fork Type	Swivel Caster With Total Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.28kgs
Standard	ISO22881


Advantages at a glance

Rolling Resistance ● ● ● ● ●


Operating Noise ● ● ● ● ●

Floor Surface Preservation ● ● ● ● ●

Dimensions

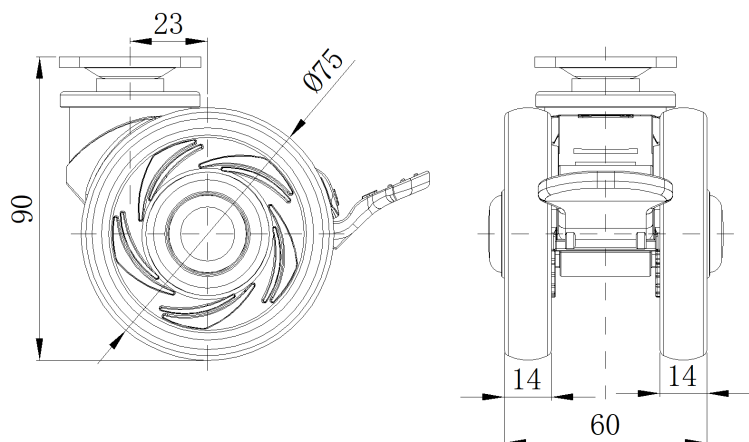

Mounting

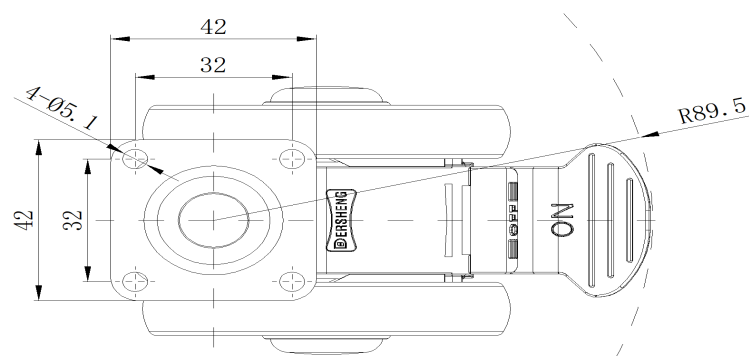

* For any deviation between metric and imperial spec, please refer to the metric spec.