



1146 46 Ascendant Series Caster Series(All Plastic)


Resolute Rubber wheel (all black) Wheel Diameter x Wheel Width 75 x 14mm

EAN  
KS-11460391454143

Short Total Brake Casters, 32x32 angled hole Top Plate  
Black legs made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium-duty trolleys  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Black, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

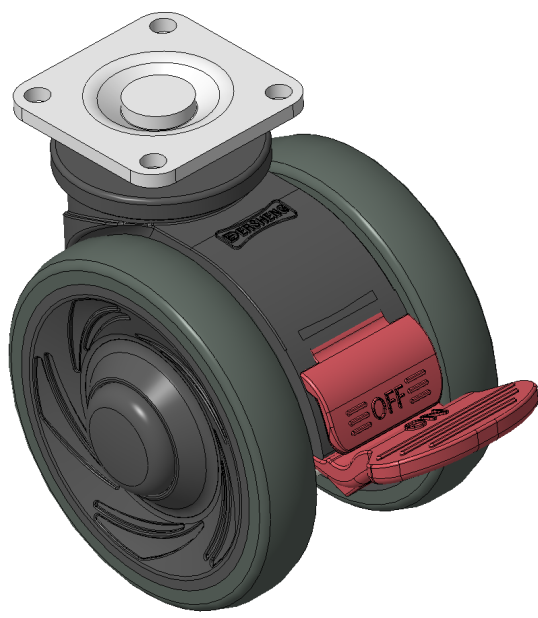

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 3 "                            |
| Wheel Width                                                            | 2-7/16 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 1-11/16 " x 1-11/16 "          |
| Bolt Hole Spacing                                                      | 1-1/4"x1-1/4"                  |
| Plate Hole                                                             | 1/4 "                          |
| Offset                                                                 | 15/16 "                        |
| Swivel Interference                                                    | 7-1/16 "                       |
| Overall Height                                                         | 3-9/16 "                       |
| Swivel Radius                                                          | 3-9/16 "                       |
| Hardness Of Tread                                                      | 72±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 198lbs                         |
| Load Capacity (Static)                                                 | 298lbs                         |
| Temperature                                                            | -4°F to +140°F                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.6lbs                         |
| Standard                                                               | ISO22881                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

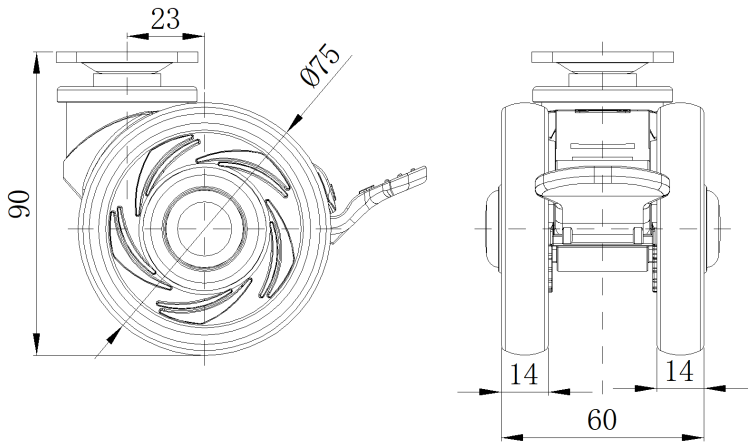

Mounting

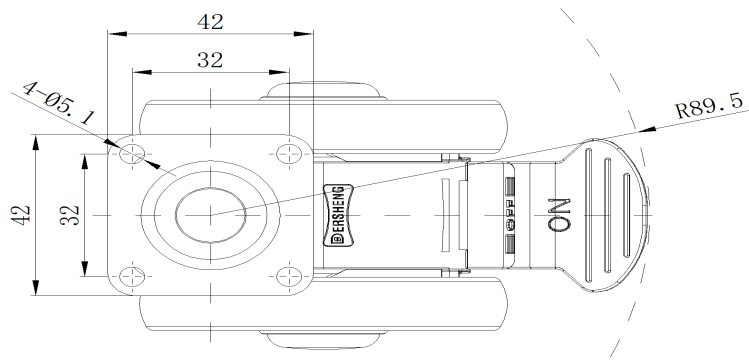

\* For any deviation between metric and imperial spec, please refer to the metric spec.