1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel(all dark gray) Wheel Diameter x Wheel Width 75 x 14mm


EAN

KS-11460391459443

Short Total Brake Casters, Single Bolthole polyamide legs—hollow 10.5
Dark gray legs made of polyamide reinforcement
White-zinc surface on hollow rivets, locking Mounting Type device
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Swivel Radius

Wheel Diameter

Wheel Width 2-7/16 "

Wheel Bearing Wheels With Ball Bearings

3 "

3-9/16 "

Single Bolt HoleCentre Hole 3/8 "

Offset 15/16 "

Swivel Interference 7-1/16 "

Overall Height 3-1/4 "

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.5lbs

Standard ISO22881


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation

Dimensions

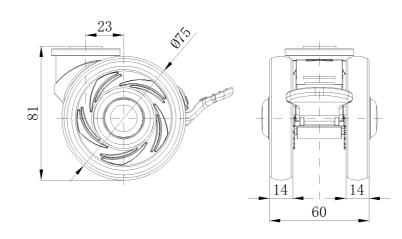

Mounting

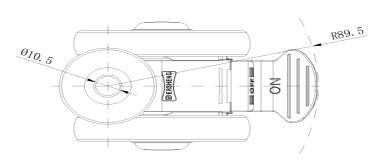

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.