# 1146 46 Ascendant Series Caster Series(All Plastic)

Dersheng Casters Keep Rolling

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 100 x 18mm

EAN

KS-11460400458083

Long Total Brake Casters, mortise-and-tenon Stamping Fork—Ø21.6x56L

White legs made of polyamide reinforced material

Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation


High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

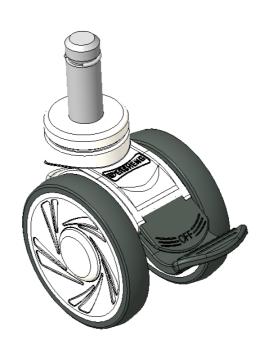

Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 85.5mm

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 21.6mm Stem Length 56mm Offset 32mm Swivel Interference 250mm Overall Height 120mm **Swivel Radius** 125mm

72±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 100kgs Load Capacity (Static) 150kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 0.90kgs Standard ISO22881


#### Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

### **Dimensions**

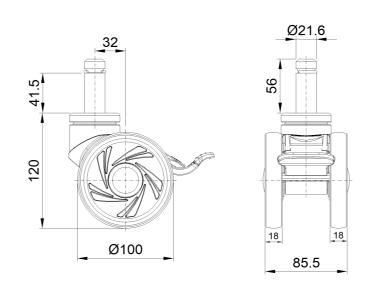

## Mounting

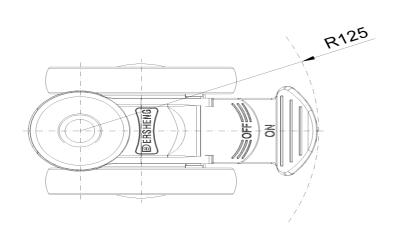

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.