



1146 46 Ascendant Series Caster Series(All Plastic)


Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 100 x 14mm

EAN  
KS-11460491454013

Short Total Brake Casters, 42.5x42.5mm angled perforated Top Plate  
White legs made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

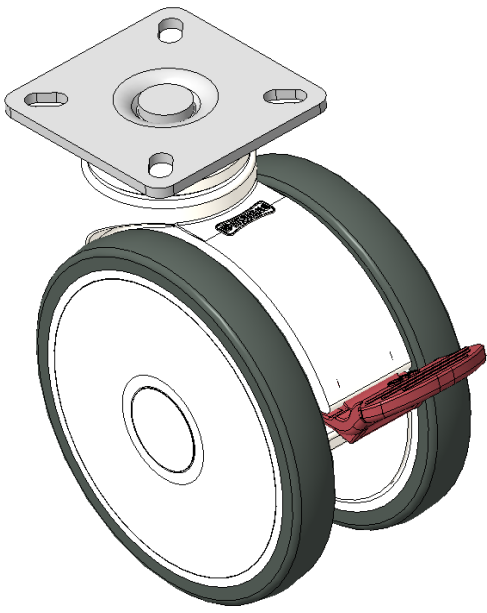

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 4 "                            |
| Wheel Width                                                            | 2-7/16 "                       |
| Wheel Bearing                                                          | Wheel With Plain Bearing       |
| Plate Size                                                             | 2-7/16 " x 2-7/16 "            |
| Bolt Hole Spacing                                                      | 1-11/16"x1-11/16"              |
| Plate Hole                                                             | 3/8 " x 1/4 "                  |
| Offset                                                                 | 1-1/8 "                        |
| Swivel Interference                                                    | 8-1/8 "                        |
| Overall Height                                                         | 4-7/8 "                        |
| Swivel Radius                                                          | 4-1/16 "                       |
| Hardness Of Tread                                                      | 72±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 198lbs                         |
| Load Capacity (Static)                                                 | 298lbs                         |
| Temperature                                                            | -4°F to +140°F                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 1.0lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

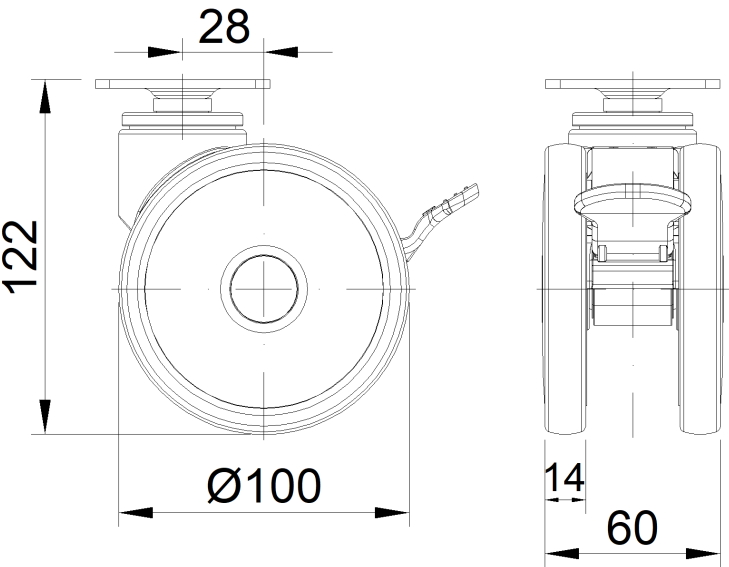

Mounting

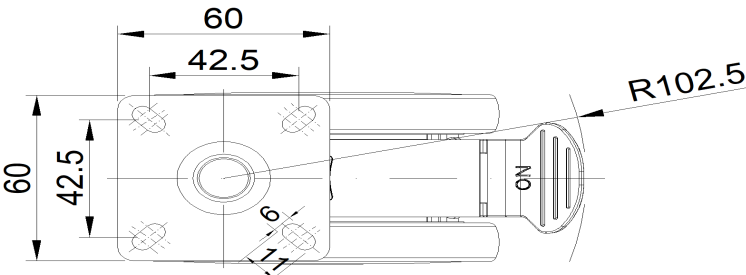

\* For any deviation between metric and imperial spec, please refer to the metric spec.