

## 1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 100 x 14mm


EAN

KS-11460491454033

Short Total Brake Casters, 75x45 angled perforated Top Plate  
 White legs made of polyamide reinforced material  
 Rust-proof, Corrosion resistant, Smooth rotation, suitable for low and medium-duty trolleys  
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
 Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
 Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

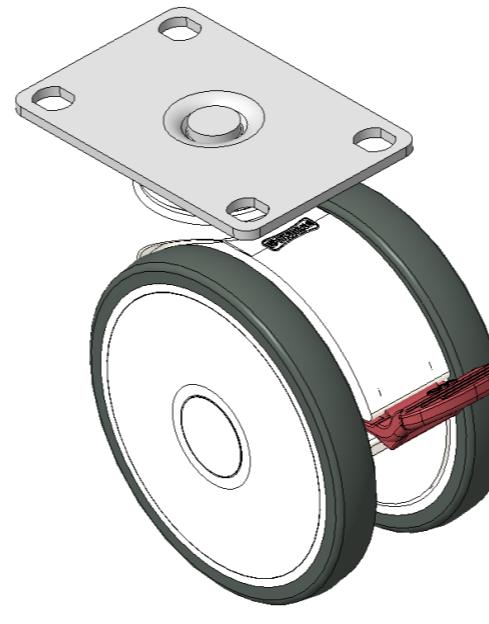

Picture may differ from original product

## Technical Data

 Metric  Imperial

Wheel Diameter 100mm

Wheel Width 60mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 92 x 62mm

Bolt Hole Spacing 75 x 45mm

Plate Hole 11 x 9.6mm

Offset 28mm

Swivel Interference 205mm

Overall Height 122mm

Swivel Radius 102.5mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 90kgs

Load Capacity (Static) 135kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.58kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • •

Floor Surface Preservation • • • •

## Dimensions

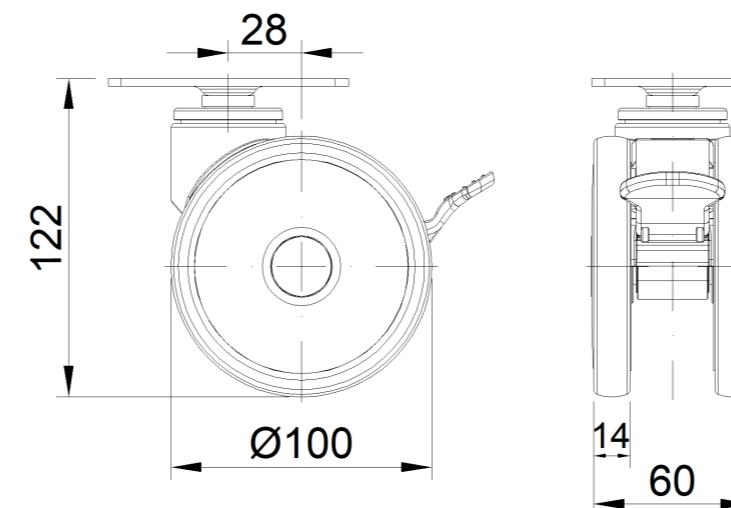

## Mounting

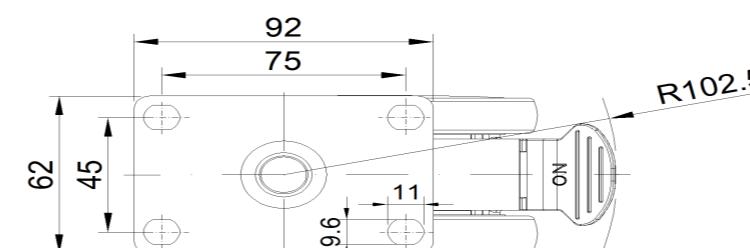

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com