



1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (window gray dark gray) Wheel Diameter x Wheel Width 100 x 18mm


EAN

KS-11460491455133

Adjustable Casters, Threaded Stem M10x25  
Window gray/dark gray Casters made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Window gray/dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

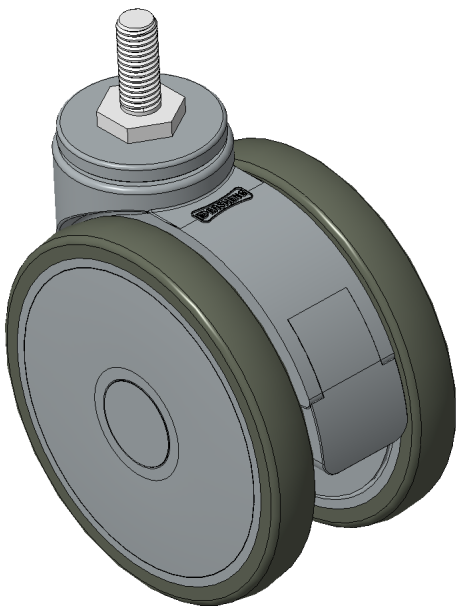

Picture may differ from original product


Technical Data

|                                                                                   |                           |
|-----------------------------------------------------------------------------------|---------------------------|
| <div><div><div></div></div><div><div></div></div></div> <div>MetricImperial</div> |                           |
| Wheel Diameter                                                                    | 100mm                     |
| Wheel Width                                                                       | 060mm                     |
| Wheel Bearing                                                                     | Wheels With Ball Bearings |
| Threaded Stem                                                                     | M10                       |
| Threaded Length                                                                   | 25mm                      |
| Offset                                                                            | 28mm                      |
| Swivel Interference                                                               | 166mm                     |
| Overall Height                                                                    | 115mm                     |
| Swivel Radius                                                                     | 83mm                      |
| Hardness Of Tread                                                                 | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                           | 90kgs                     |
| Load Capacity (Static)                                                            | 135kgs                    |
| Temperature                                                                       | -20°C to +60°C            |
| Fork Type                                                                         | Swivel Caster             |
| Stainless                                                                         | N/A                       |
| Electrical Conductivity                                                           | N/A                       |
| Anti-Static                                                                       | N/A                       |
| Weight                                                                            | 0.38kgs                   |
| Standard                                                                          | ISO22881                  |


Advantages at a glance

|                            |       |
|----------------------------|-------|
| Rolling Resistance         | ●●●●● |
| Operating Noise            | ●●●●● |
| Floor Surface Preservation | ●●●●● |

Dimensions

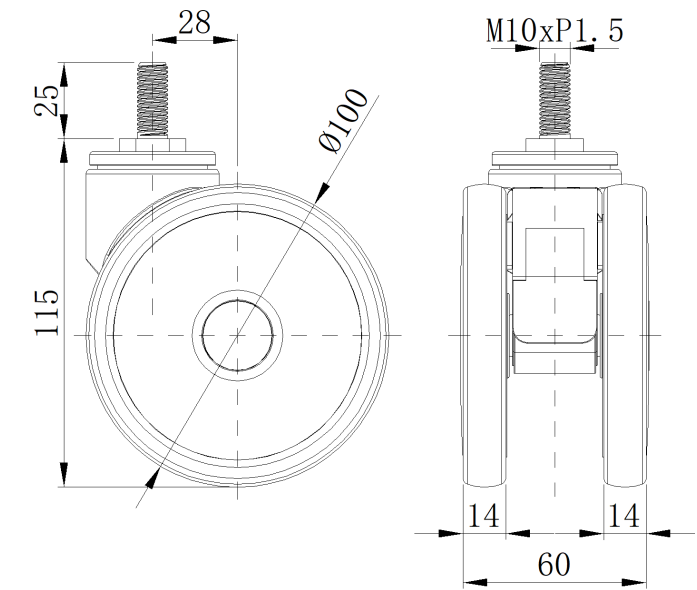

Mounting

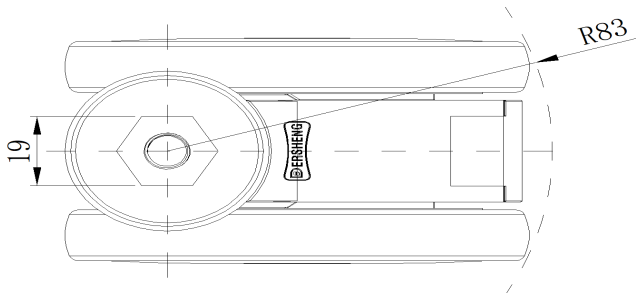

\* For any deviation between metric and imperial spec, please refer to the metric spec.