

1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (window gray dark gray) Wheel Diameter x Wheel Width 100 x 18mm


EAN

KS-11460491456453

Short Total Brake Casters, Threaded Stem M10x17  
Window gray/dark gray Casters made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Window gray/dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

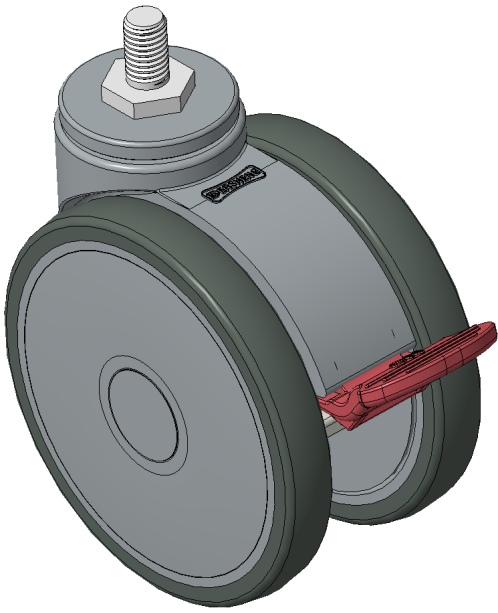

Picture may differ from original product


Technical Data

|                                                                                  |                                |
|----------------------------------------------------------------------------------|--------------------------------|
| <div><div><div></div></div><div><div>Metric</div><div>Imperial</div></div></div> |                                |
| Wheel Diameter                                                                   | 100mm                          |
| Wheel Width                                                                      | 060mm                          |
| Wheel Bearing                                                                    | Wheels With Ball Bearings      |
| Threaded Stem                                                                    | M10                            |
| Threaded Length                                                                  | 17mm                           |
| Offset                                                                           | 28mm                           |
| Swivel Interference                                                              | 205mm                          |
| Overall Height                                                                   | 115mm                          |
| Swivel Radius                                                                    | 102.5mm                        |
| Hardness Of Tread                                                                | 72±5° Shore A                  |
| Load Capacity (Dynamic)                                                          | 90kgs                          |
| Load Capacity (Static)                                                           | 135kgs                         |
| Temperature                                                                      | -20°C to +60°C                 |
| Fork Type                                                                        | Swivel Caster With Total Brake |
| Stainless                                                                        | N/A                            |
| Electrical Conductivity                                                          | N/A                            |
| Anti-Static                                                                      | N/A                            |
| Weight                                                                           | 0.39kgs                        |
| Standard                                                                         | ISO22881                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

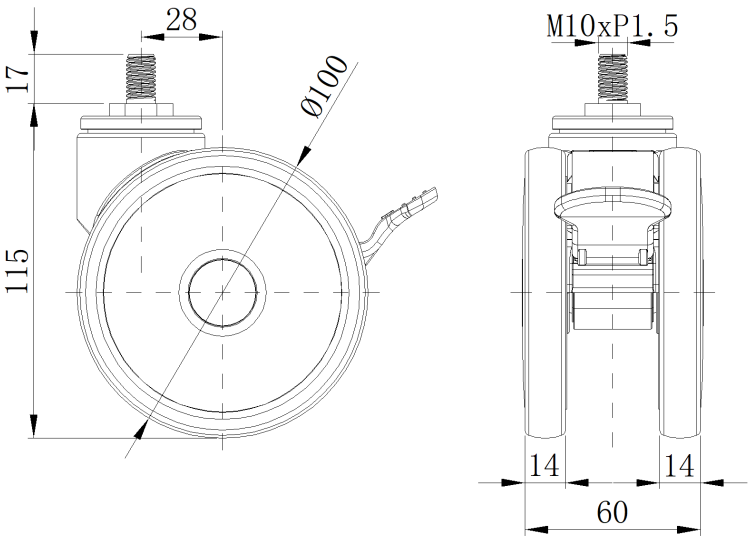

Mounting

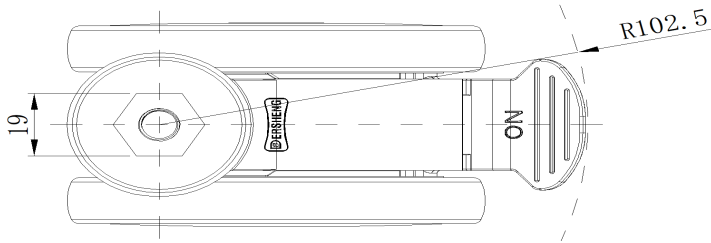

\* For any deviation between metric and imperial spec, please refer to the metric spec.