



1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (window gray dark gray - large cover version) Wheel Diameter  
x Wheel Width 12

EAN


KS-11460500451123

Rigid Casters, 75x45 angled hole Top Plate Window gray Casters made of polyamide reinforced material Rust-proof, Corrosion resistant, Attractive appearance, Economical, and Smooth rotation High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread Dark gray, Bearing - Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

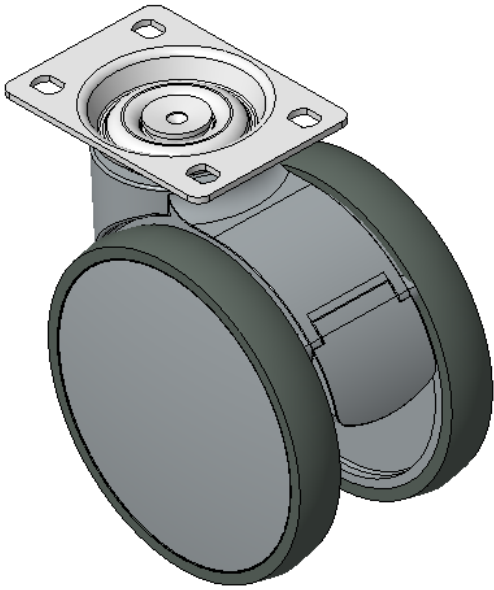

Picture may differ from original product

Technical Data


☒ Imperial ☐ Metric

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 5 "                       |
| Wheel Width             | 3-1/4                     |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 3-7/8 " x 2-3/4 "         |
| Bolt Hole Spacing       | 3 " x 1-13/16 "           |
| Plate Hole              | 3/8 " x 3/8 "             |
| Overall Height          | 5-7/8 "                   |
| Hardness Of Tread       | 72±5° Shore A             |
| Load Capacity (Dynamic) | 243lbs                    |
| Load Capacity (Static)  | 364lbs                    |
| Temperature             | -4°F to +140°F            |
| Fork Type               | Rigid Caster              |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 1.7lbs                    |
| Standard                | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

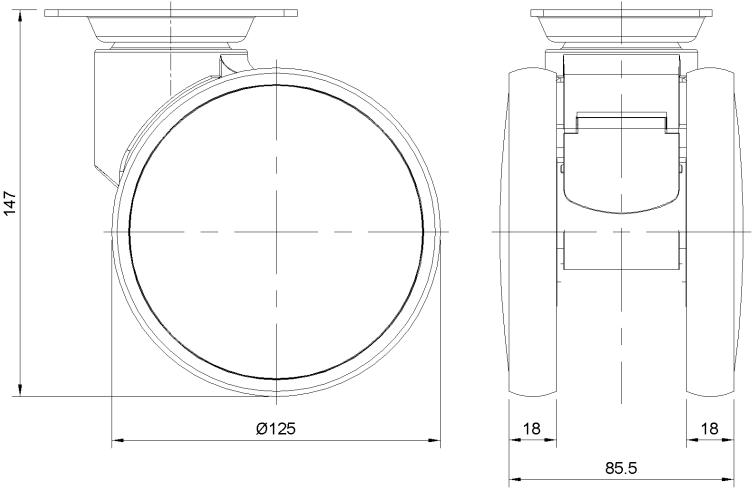

Mounting

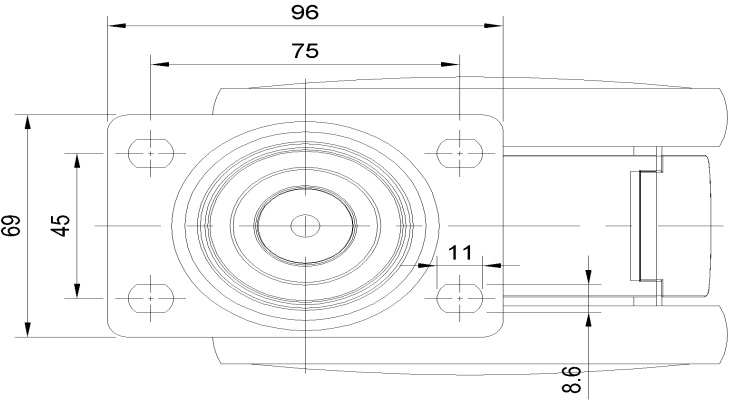

\* For any deviation between metric and imperial spec, please refer to the metric spec.