



1146 46 Ascendant Series Caster Series(All Plastic)

Resolute Rubber wheel (white dark gray - large cover version) Wheel Diameter x Wheel Width 125 x 18


EAN

KS-11460500456673

Long Total Brake Casters, Threaded Stem M16x25  
White legs made of polyamide reinforced material  
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation  
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread  
Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)  
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

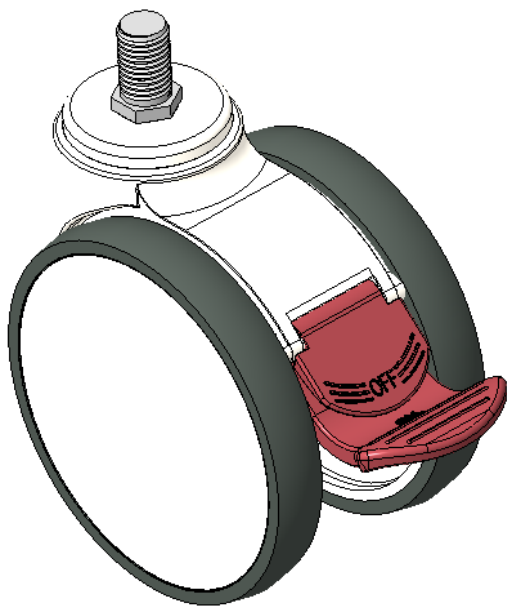

Picture may differ from original product


Technical Data

|                                                                                                         |                           |
|---------------------------------------------------------------------------------------------------------|---------------------------|
| <div><div><div></div></div><div><div></div></div></div> <div><div>Metric</div><div>Imperial</div></div> |                           |
| Wheel Diameter                                                                                          | 125mm                     |
| Wheel Width                                                                                             | 85.5mm                    |
| Wheel Bearing                                                                                           | Wheels With Ball Bearings |
| Threaded Stem                                                                                           | M16                       |
| Threaded Length                                                                                         | 25mm                      |
| Offset                                                                                                  | 40mm                      |
| Swivel Interference                                                                                     | 282mm                     |
| Overall Height                                                                                          | 144mm                     |
| Swivel Radius                                                                                           | 141mm                     |
| Hardness Of Tread                                                                                       | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                                                 | 110kgs                    |
| Load Capacity (Static)                                                                                  | 165kgs                    |
| Temperature                                                                                             | -20°C to +60°C            |
| Fork Type                                                                                               | Swivel Caster             |
| Stainless                                                                                               | N/A                       |
| Electrical Conductivity                                                                                 | N/A                       |
| Anti-Static                                                                                             | N/A                       |
| Weight                                                                                                  | 0.75kgs                   |
| Standard                                                                                                | ISO22881                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

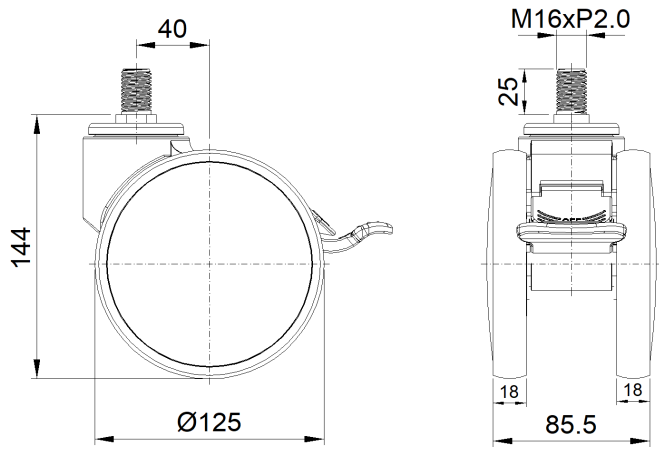

Mounting

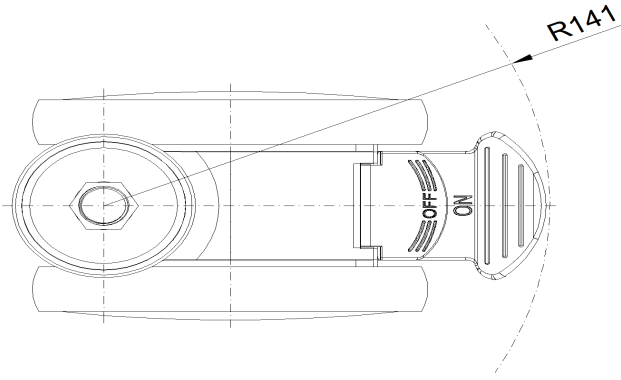

\* For any deviation between metric and imperial spec, please refer to the metric spec.