# 1146 46 Ascendant Series Caster Series(All Plastic)



Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11460500459223


Modible Casters, Single Bolthole polyamide legs—hollow Ø12.2
White legs made of polyamide reinforcement
Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for Smooth rotation
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread

Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 85.5mm

Wheel Bearing Wheels With Ball Bearings

Single Bolt HoleCentre Hole 12.2mm

Offset 40mm

Swivel Interference 220mm

Overall Height 144mm

Swivel Radius 110mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 110kgs
Load Capacity (Static) 165kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.64kgs

Standard ISO22883


### Advantages at a glance


Rolling Resistance

Operating Noise • • • •


Floor Surface Preservation • • • • •

#### Dimensions





## Mounting

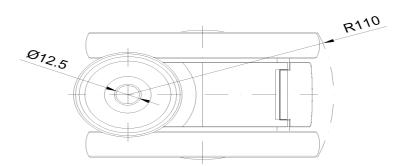

 $<sup>\</sup>boldsymbol{\ast}$  For any deviation between metric and imperial spec, please refer to the metric spec.