



1147 Universal (Single) Spring Wheel Series

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11470600041211

Rigid, Spring-loaded Caster with Welded Caster Fork, blue-painted finish.
Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread, Cast Iron black Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

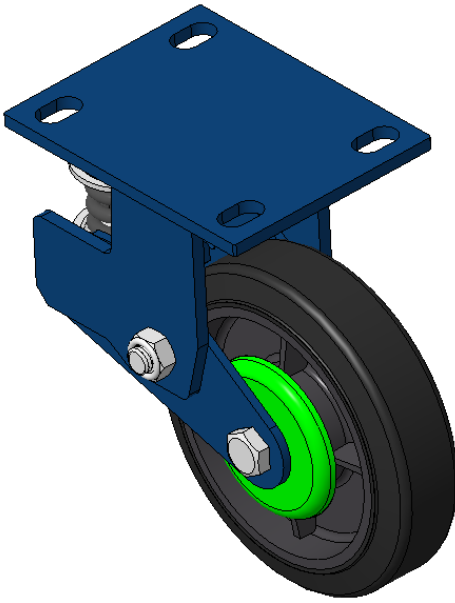

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	2213mm
Overall Height	198mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	
Load Capacity (Static)	
	Temperature
-20°C to +80°C	Fork Type
Rigid Caster	
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.02kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ● ○

Dimensions

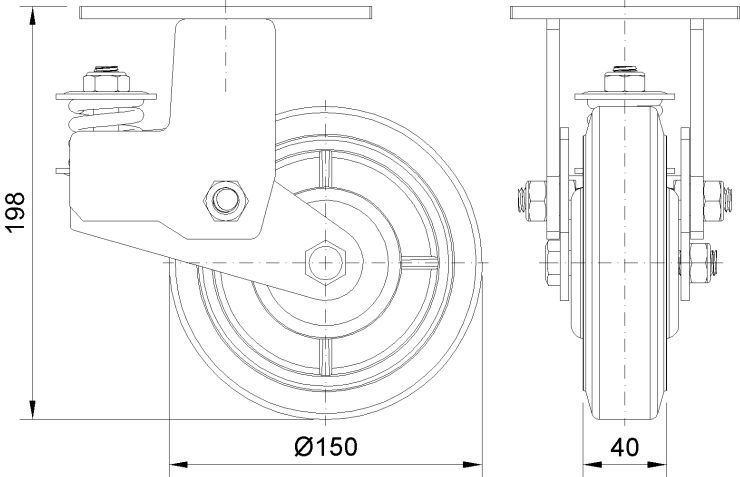

Mounting

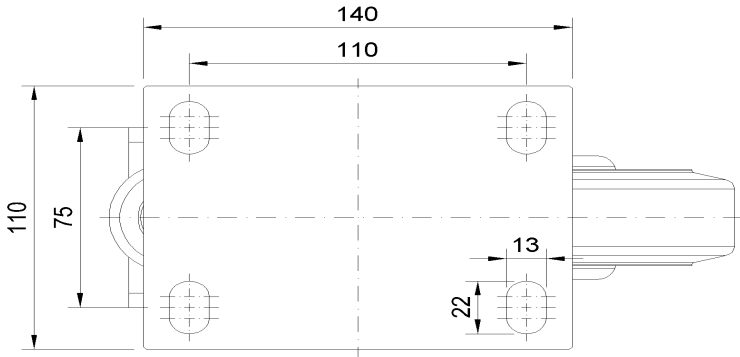

* For any deviation between metric and imperial spec, please refer to the metric spec.