

1147 Universal (Single) Spring Wheel Series

PU (red round) Wheel Diameter x Wheel Width 150x 42mm


EAN

KS-11470600331211

Rigid Spring-loaded Caster with Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread Red Cast Iron finish, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

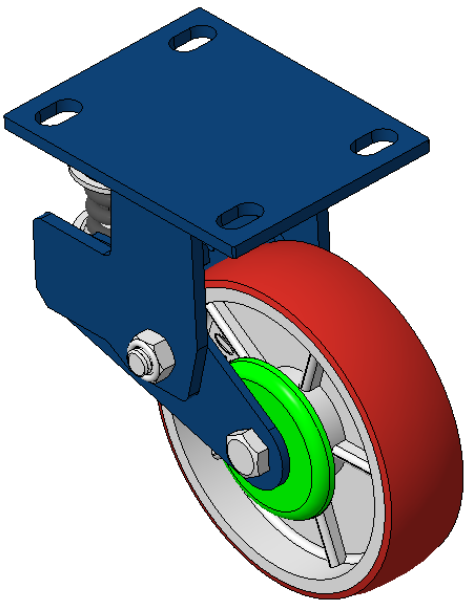

Picture may differ from original product

Technical Data


☒ Metric ☐ Imperial

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 150mm                     |
| Wheel Width             | 42mm                      |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 140 x 110mm               |
| Bolt Hole Spacing       | 110x75mm                  |
| Plate Hole              | 22 x 13mm                 |
| Overall Height          | 198mm                     |
| Hardness Of Tread       | 92±5° Shore A             |
| Load Capacity (Dynamic) | 410kgs                    |
| Load Capacity (Static)  | 615kgs                    |
| Temperature             | -20°C to +70°C            |
| Fork Type               | Rigid Caster              |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 4.02kgs                   |
| Standard                | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

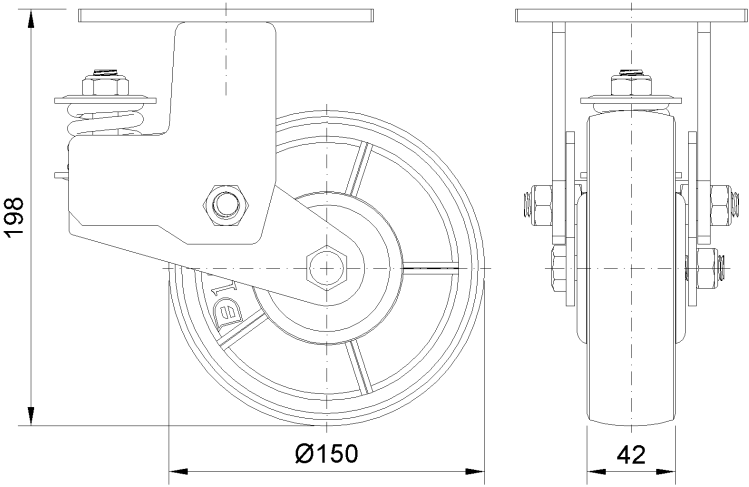

Mounting

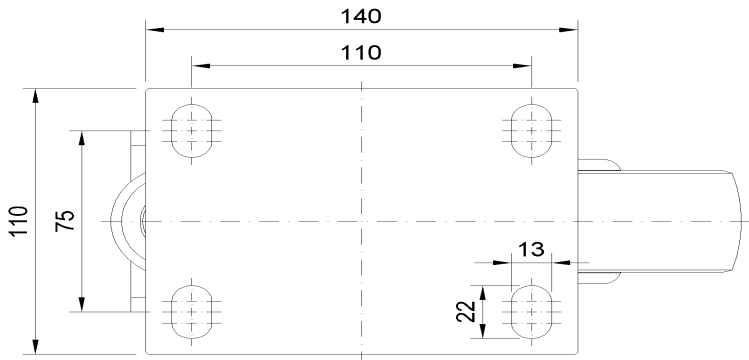

\* For any deviation between metric and imperial spec, please refer to the metric spec.