1147 Universal (Single) Spring Wheel Series

Dersheng Casters Keep Rolling

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11470600534211

Spring-loaded Caster with front brake, Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-11/16"

Wheel Bearing Wheels With Ball Bearings

6"

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 15/16 " x 9/16 "

 Offset
 1-15/16 "

 Swivel Interference
 14-3/4" "

Overall Height 7-15/16 "

Swivel Radius 7-1/2 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) Olbs

Load Capacity (Static) Olbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 14.2lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

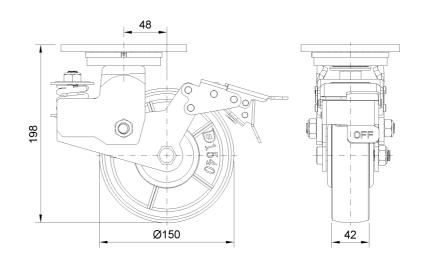

Mounting

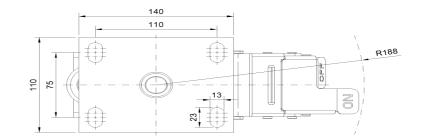

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.