1147 Universal (Single) Spring Wheel Series

EQPU (brown arc) Wheel Diameter x Wheel Width 150 x 42mm


EAN

KS-11470600552211

Swivel Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread
Cast Iron brown, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 23 x 13mm Offset 48mm 250mm Swivel Interference Overall Height 198mm **Swivel Radius** 125mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 550kgs

Load Capacity (Static) 825kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.91kgs


Standard ISO22883

Advantages at a glance


Rolling Resistance • • • • • Operating Noise

Floor Surface Preservation • • • • •

Dimensions

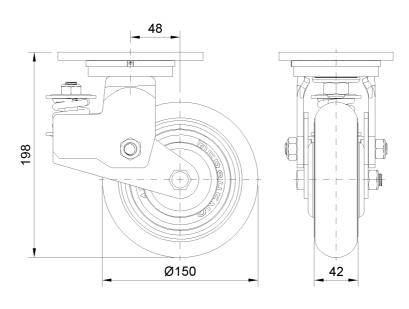

Mounting

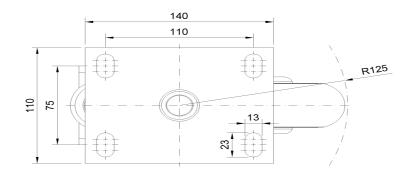

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.