1147 Universal (Single) Spring Wheel Series

AQPU (brown) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11470600602021

Swivel Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 129x74 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread
Cast Iron brown, Bearing – Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 159 x 114mm **Bolt Hole Spacing** 129.4 x 73.8mm Plate Hole 2313mm Offset 48mm 250mm Swivel Interference Overall Height 198mm **Swivel Radius** 125mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.57kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

ricor canace riccorvation is a sign

Dimensions

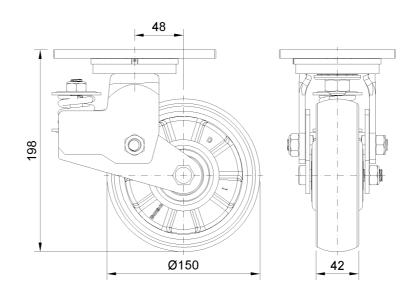

Mounting

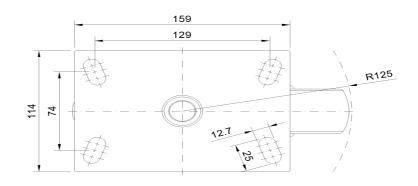

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.