

1148-1 48 Series Central Locking Caster Series (All Plastic)



TPR wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11480501268213

Center-locking full-brake Caster with long control lever and Hexagonal hole cam control
 White Fork, simple and Attractive appearance, Smooth rotation
 High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread
 Dark gray, Bearing—Ball Bearings

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Metric Imperial

Wheel Diameter 125mm

Wheel Width 75mm

Wheel Bearing Wheels With Ball Bearings

Stem Diameter 28mm

Stem Length 96mm

Offset 38.5mm

Swivel Interference 214mm

Overall Height 150mm

Swivel Radius 107mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 150kgs

Load Capacity (Static) 225kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.98kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

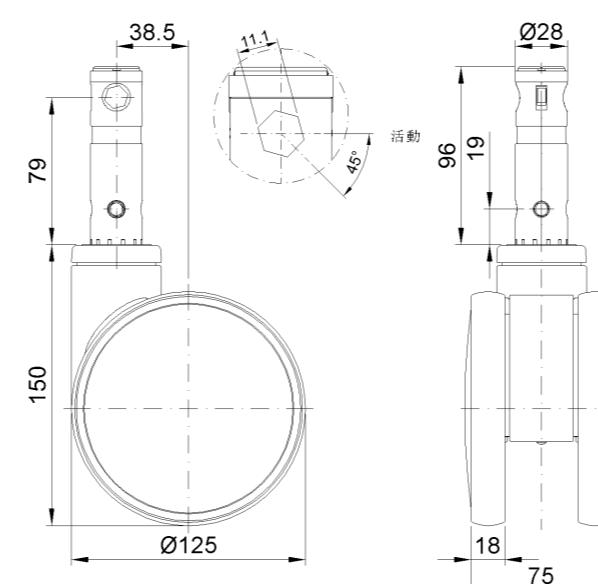

Mounting

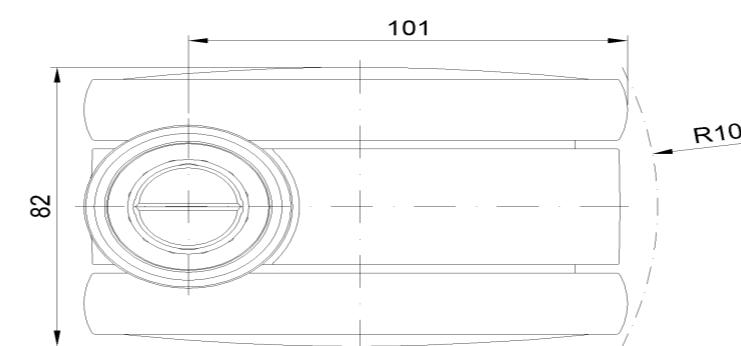

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com