1148-1 48 Series Central Locking Caster Series (All Plastic)

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11480501458223

Center-locked full or directional brake with long control lever and Hexagonal hole cam control. Casers

White Casters, simple and Attractive appearance, Smooth rotation.
High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm Wheel Width 75mm

Wheels With Ball Bearings Wheel Bearing

Stem Diameter 28mm Stem Length 96mm Offset 38.5mm Swivel Interference 214mm Overall Height 150mm **Swivel Radius** 107mm

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 150kgs Load Capacity (Static) 225kgs

Temperature -20°C to +60°C

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A Anti-Static N/A Weight 0.98kgs Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

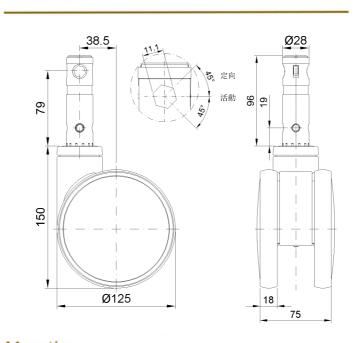

Mounting

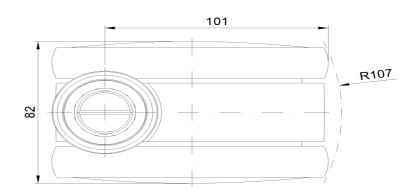

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.