## 1148-1 48 Series Central Locking Caster Series (All Plastic)

Resolute Rubber wheel (white dark gray) Wheel Diameter x Wheel Width 125 x 18mm

EAN

KS-11480501458223

Center-locked full or directional brake with long control lever and Hexagonal hole cam control. Casers

White Casters, simple and Attractive appearance, Smooth rotation.

High-Quality Impact-Resistant Polypropylene Wheel Center, High-Quality Reinforced Polypropylene Rubber (TPR) Wheel Tread.

Dark gray, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Imperial ○ Metric

5 " Wheel Diameter

3 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

1-1/8 " Stem Diameter 3-7/8 " Stem Length 1-9/16 " Offset 8-1/2 " Swivel Interference

Overall Height 4-1/4 " Swivel Radius

Hardness Of Tread 72±5° Shore A

Load Capacity (Dynamic) 331lbs Load Capacity (Static) 496lbs

-4°F to +140°F Temperature

Fork Type Swivel Caster With Total Brake

N/A Stainless **Electrical Conductivity** N/A

Anti-Static N/A Weight 2.2lbs

Standard


Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

## **Dimensions**



Mounting

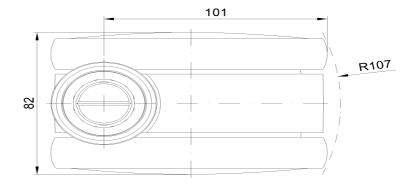

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883