



1152 Anti-Friction Caster Series

QPU (Brown Flat) Wheel Diameter x Wheel Width 100 x 50mm


EAN

KS-11520400531021

Rigid Caster, Welded Caster Fork - 85x70 Bolt Hole Spacing  
Blue painted finish, Mounting Type - Top Plate  
Cast Iron core, High Quality Polyurethane Wheel Tread  
Cast Iron brown, Bearing - Ball Bearings.

Wheel Tread: Hhigh-Quality Polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

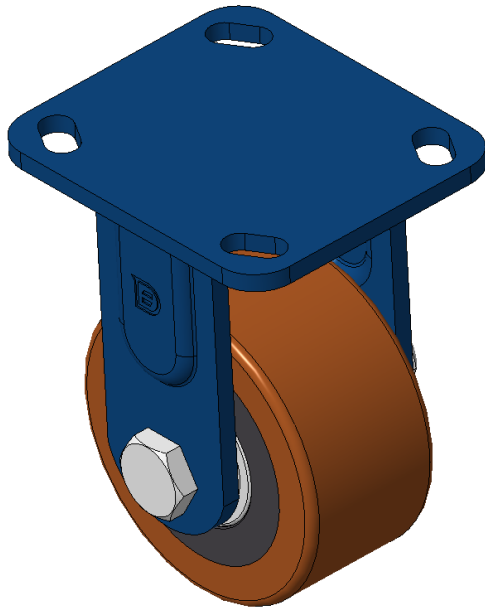

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 4 "                       |
| Wheel Width                                                            | 2 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 4-9/16 " x 4-3/8 "        |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "         |
| Plate Hole                                                             | 13/16 " x 3/8 "           |
| Overall Height                                                         | 5-5/8 "                   |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 1102lbs                   |
| Load Capacity (Static)                                                 | 1653lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Rigid Caster              |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 4.7lbs                    |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

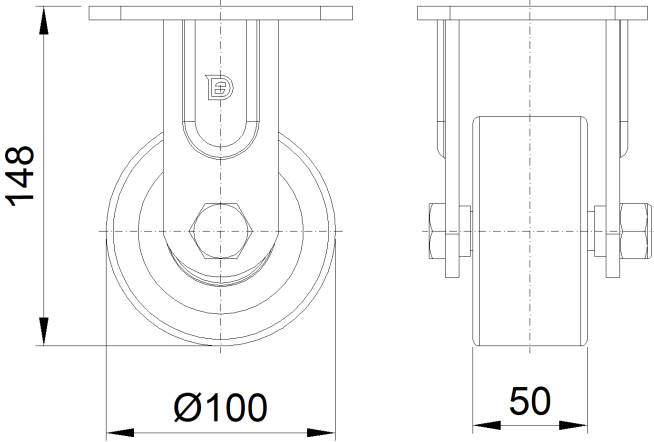

Mounting

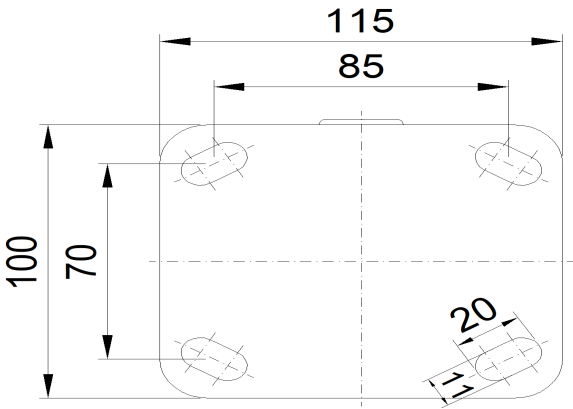

\* For any deviation between metric and imperial spec, please refer to the metric spec.