1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11520400532411

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 110 x 75 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing - Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Technical Data

Swivel Radius

● Imperial ○ Metric

Wheel Diameter

Wheel Width 2-13/16 "

Wheel Bearing Wheels With Ball Bearings

4 "

4 "

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 1-3/4 "

Swivel Interference 8 "

Overall Height 5-9/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1213lbs

Load Capacity (Static) 1819lbs

Temperature -4°F to +158°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.0lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

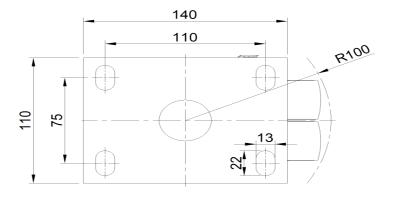

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.