



1152 Anti-Friction Caster (B Type) Series

XPU (burgundy flat) Wheel Diameter x Wheel Width 100 x 50mm


EAN

KS-11520400641311

Rigid Caster with Welded Caster Fork and blue paint finish. Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing. Cast Iron Wheel Center with High Quality Polyurethane tread, burgundy finish. Bearing—Ball Bearing.

Wheel tread: high-quality polyurethane wheel tread
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

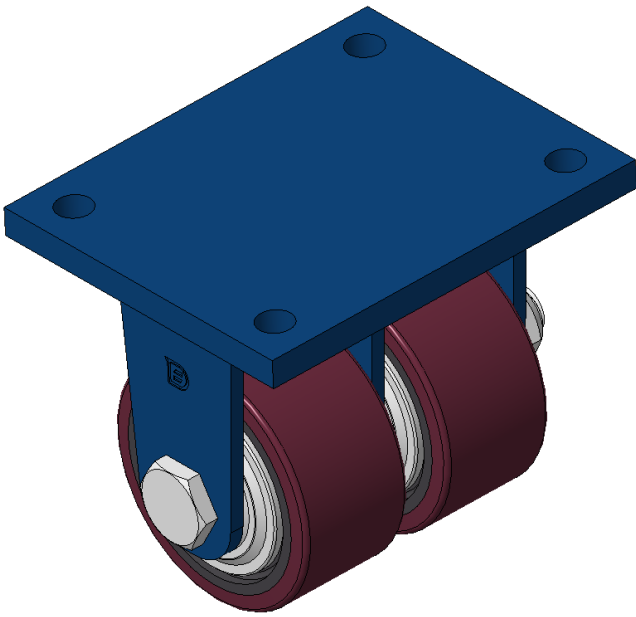

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	118mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	175 x 140mm
Bolt Hole Spacing	140x105mm
Plate Hole	15mm
Overall Height	150mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	900kgs
Load Capacity (Static)	1350kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	6.93kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ● ○

Dimensions

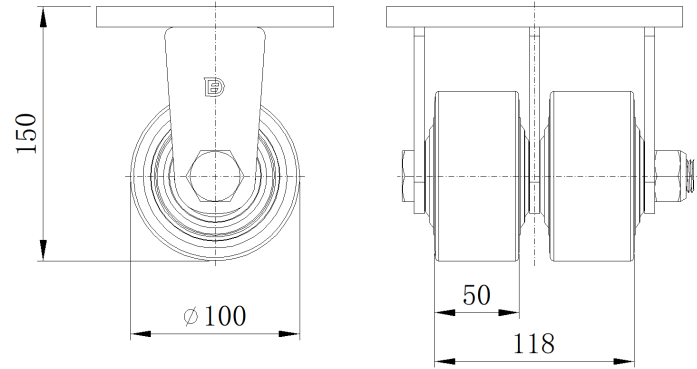

Mounting

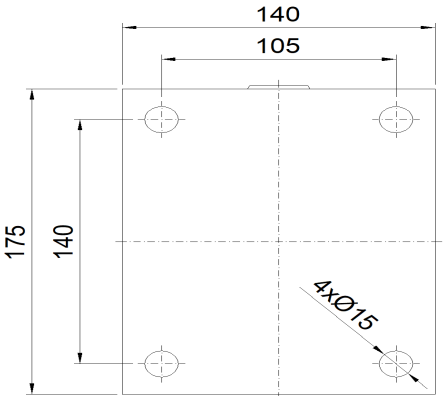

* For any deviation between metric and imperial spec, please refer to the metric spec.