



1152 Anti-Friction Caster (B Type) Series

XPU (burgundy flat) Wheel Diameter x Wheel Width 100 x 50mm


EAN

KS-11520400642311

Swivel Caster, Welded Caster Fork, blue paint surface Top Plate Mounting Type device, Hole spacing 140x105 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, wine red Bearing-Ball Bearing

Wheel tread: Made of high quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

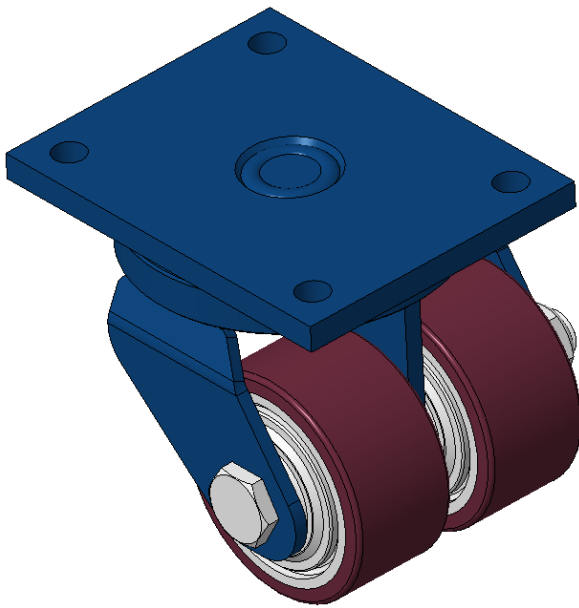

Picture may differ from original product

Technical Data


☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	120mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 175mm
Bolt Hole Spacing	140x105mm
Plate Hole	15mm
Offset	48mm
Swivel Interference	230mm
Overall Height	150mm
Swivel Radius	115mm
Hardness Of Tread	° Shore A
Load Capacity (Dynamic)	900kgs
Load Capacity (Static)	1350kgs
Temperature	Fork Type

Swivel Caster	
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	9.43kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

Dimensions

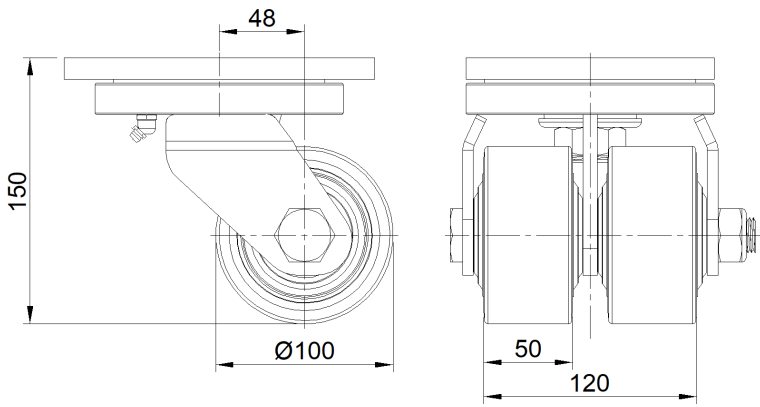

Mounting

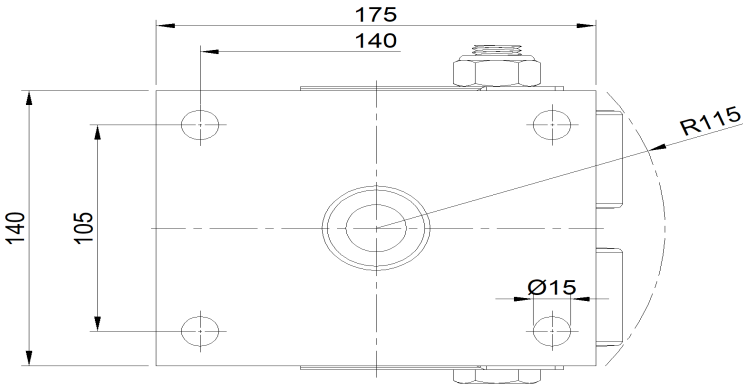

* For any deviation between metric and imperial spec, please refer to the metric spec.