



1152 Anti-Friction Caster (B Type) Series

PU (red flat) Wheel Diameter × Wheel Width 125 × 40 mm


EAN

KS-11520500332321

Swivel Caster with Welded Caster Fork, blue painted finish. Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron red Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

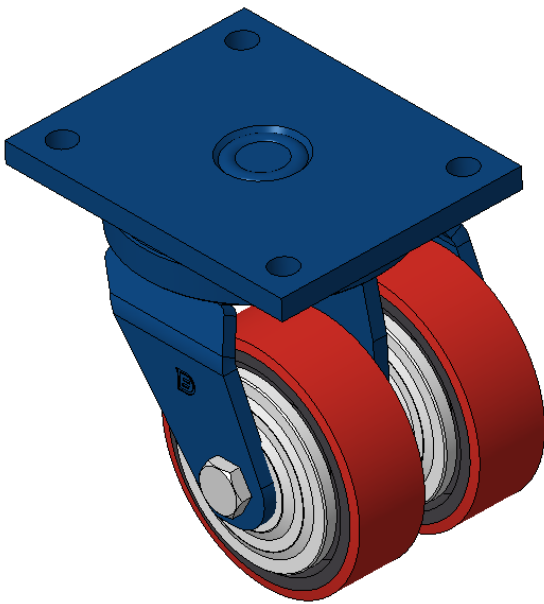

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	125mm
Wheel Width	110mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 175mm
Bolt Hole Spacing	140x105mm
Plate Hole	15mm
Offset	50mm
Swivel Interference	250mm
Overall Height	175mm
Swivel Radius	125mm
Hardness Of Tread	93±5° Shore A
Load Capacity (Dynamic)	612kgs
Load Capacity (Static)	918kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	8.53kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

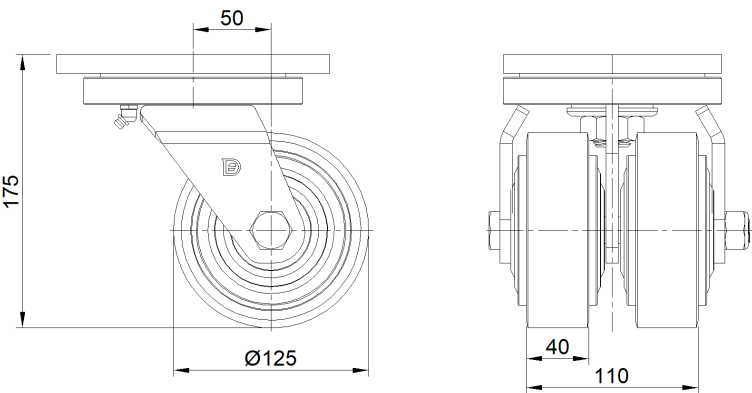

Mounting

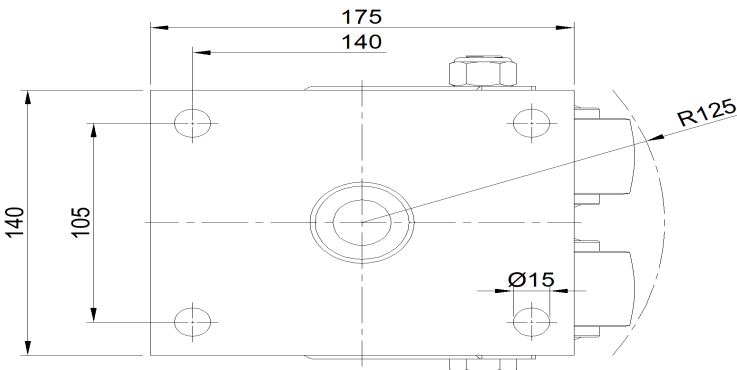

* For any deviation between metric and imperial spec, please refer to the metric spec.