# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

PU (red flat) Wheel Diameter × Wheel Width 125 × 40 mm


EAN

KS-11520500334321

Rear Brake Locking system, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron red Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

#### ● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 110mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 50mm 250mm Swivel Interference Overall Height 175mm **Swivel Radius** 125mm Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 612kgs
Load Capacity (Static) 918kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 9.51kgs

Standard ISO22883


## Advantages at a glance

Floor Surface Preservation • • • • •

### Dimensions

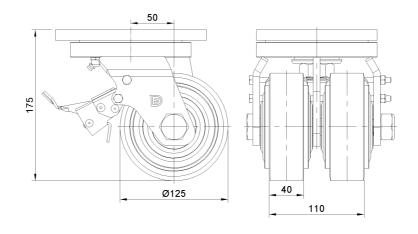

## Mounting

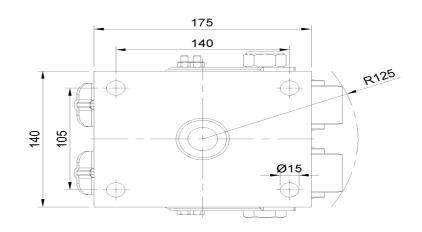

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.