# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (brown flat) Wheel Diameter x Wheel Width 125 x 40mm


**EAN** 

KS-11520500534321

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 110mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 50mm 250mm Swivel Interference **Overall Height** 175mm **Swivel Radius** 125mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 900kgs

Load Capacity (Static) 1350kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.51kgs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

#### **Dimensions**

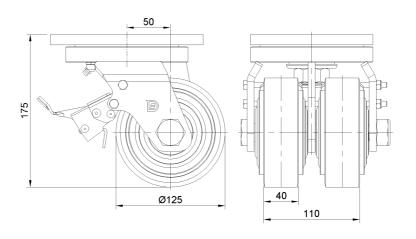

## Mounting

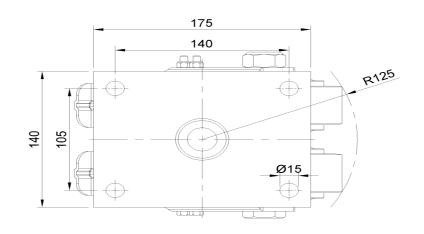

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.