1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11520500552061

Swivel Caster with Welded Caster Fork and blue paint finish. Mounting Type - Top Plate, 129x74 Bolt Hole Spacing. Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown. Bearing—Ball Bearing.

94±5° Shore A

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 5 "

Wheel Width 86mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-1/2 " x 6-3/8 "

Bolt Hole Spacing 5-1/8"x2-7/8"

Plate Hole 9/16 " x 1-1/16 "

Offset 1-13/16 "
Swivel Interference 9-1/2 "
Overall Height 6-9/16 "
Swivel Radius 4-3/4 "

Load Capacity (Dynamic) 2659lbs

Load Capacity (Static) 3988lbs

Temperature -4°F to +17

Temperature -4°F to +176°F
Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 14.2lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions



Mounting

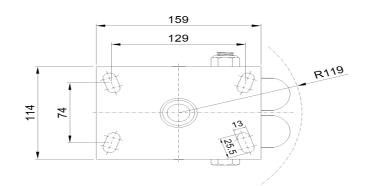

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.