1152 Anti-Friction Caster Series

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11520500554171

Front Brake locking system, Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

5-9/16 " x 4-3/8 " Plate Size **Bolt Hole Spacing** 4-5/16 " x3" 7/8 " x 9/16 " Plate Hole Offset 1-11/16 " 12-1/2 " Swivel Interference 6-13/16" Overall Height 6-5/16" Swivel Radius Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.3lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

• • • • •


Operating Noise

Floor Surface Preservation • • • • •

Dimensions

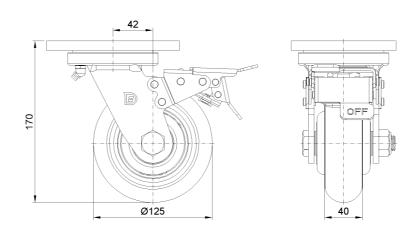

Mounting

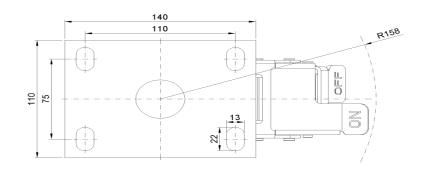

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.