1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11520500554321

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 110mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 50mm 250mm Swivel Interference Overall Height 175mm **Swivel Radius** 125mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 810kgs
Load Capacity (Static) 1215kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.64kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation • • • • •

Dimensions

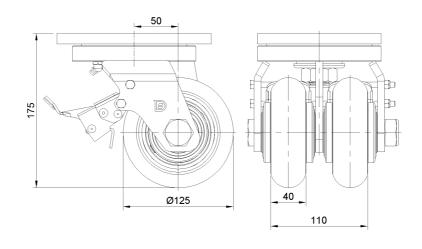

Mounting

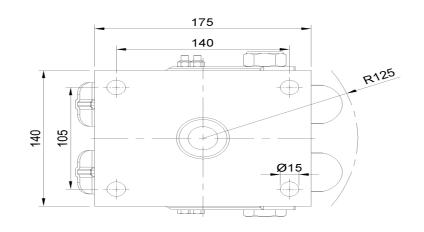

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.