# 1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11520500554321

Casters with rear brake and locking mechanism, Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 140x105 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 4-1/4"
Wheel Bearing Wheels With Ball Bearings

Plate Size 7 " x 5-9/16 "

Bolt Hole Spacing 5-1/2"x4-1/8"

Plate Hole 5/8 "

Offset 2 "

Swivel Interference 10 "

Overall Height 7 "

Swivel Radius 5 "

Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 1786lbs
Load Capacity (Static) 2679lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 21.3lbs

Standard ISO22883


#### Advantages at a glance

Rolling Resistance


Operating Noise • •

Floor Surface Preservation • • • • •

#### Dimensions

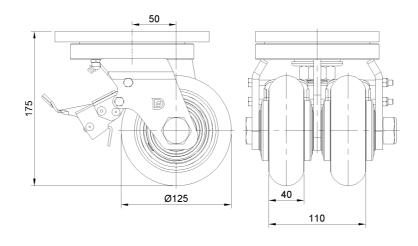

## Mounting

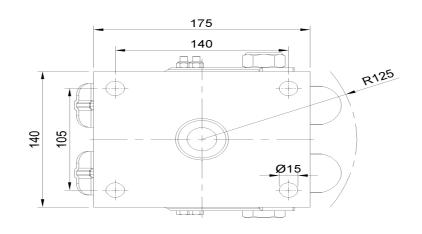

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.