



1152 Anti-Friction Caster Series

ZQPU (brown round) Wheel Diameter x Wheel Width 125 x 24 (51) mm


EAN

KS-11520500802021

Swivel Casters, Welded Caster Fork Surface spray blue paint, Top Plate installation device, Hole spacing 110x75 Wheel core made of cast iron, high quality polyurethane Wheel Tread, Cast Iron brown Bearing—special Ball Bearings to reduce Rolling Resistance ZQPU double wheels, Ergonomic design, easier to start and turn

Wheel tread: Made of high quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

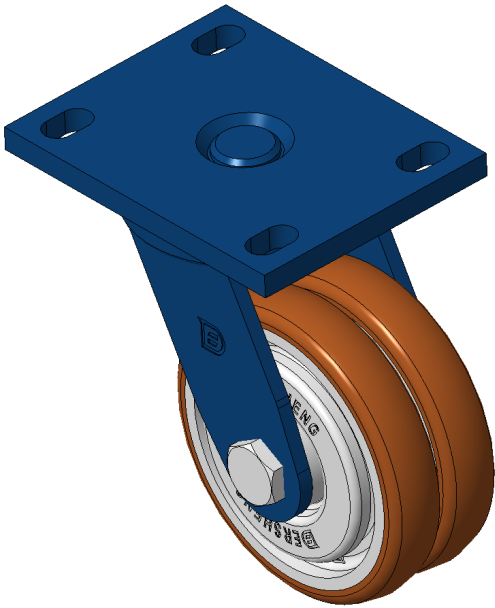

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                           |
| Wheel Diameter                                                         | 5 "                       |
| Wheel Width                                                            | 1 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 5-9/16 " x 4-3/8 "        |
| Bolt Hole Spacing                                                      | 4-5/16 " x3"              |
| Plate Hole                                                             | 7/8 " x 9/16 "            |
| Offset                                                                 | 1-11/16 "                 |
| Swivel Interference                                                    | 8-3/4 "                   |
| Overall Height                                                         | 6-13/16 "                 |
| Swivel Radius                                                          | 4-3/8 "                   |
| Hardness Of Tread                                                      | 92±5° Shore A             |
| Load Capacity (Dynamic)                                                | 992lbs                    |
| Load Capacity (Static)                                                 | 1488lbs                   |
| Temperature                                                            | -4°F to +158°F            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 10.5lbs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

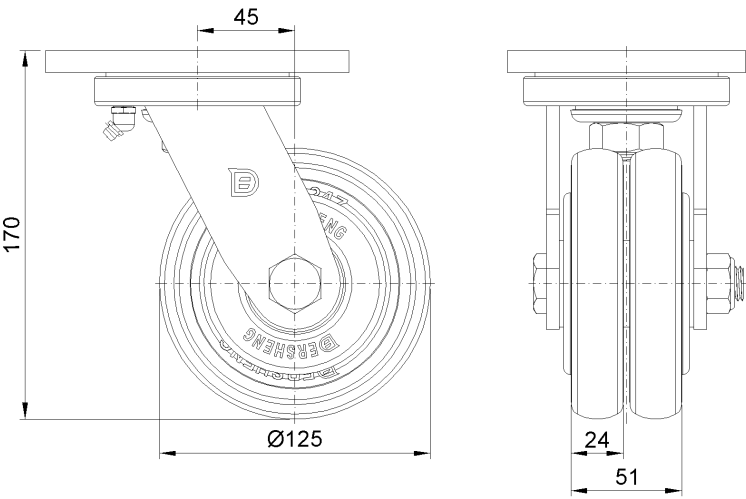

Mounting

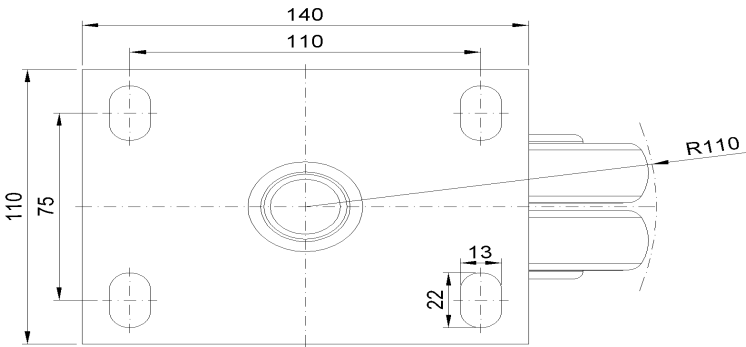

\* For any deviation between metric and imperial spec, please refer to the metric spec.