1152 Anti-Friction Caster Series

MRC (Transparent) Wheel Diameter × Wheel Width 150 x 40mm


EAN

KS-11520600072111

Swivel Caster, Welded Caster Fork, blue paint finish Mounting Type - Top Plate, 140x105mm Bolt Hole Spacing Reinforced Polypropylene, natural Wheel Tread Bearing - Ball Bearing

Wheel surface: Thermoplastic plastic (PA6) Wheel Center: Thermoplastic plastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 65mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 175 x 140mm **Bolt Hole Spacing** 140x105mm Plate Hole 15mm Offset 55mm 266mm Swivel Interference Overall Height 200mm **Swivel Radius** 133mm Hardness Of Tread 75±5° Shore D Load Capacity (Dynamic) 850kgs

Load Capacity (Static)

Temperature

-20°C to +80°C

Fork Type

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.29kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

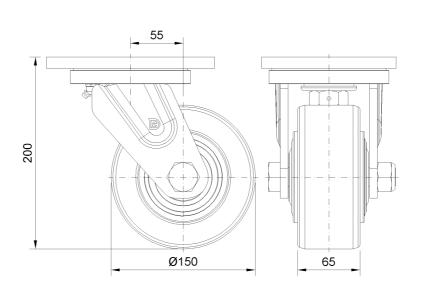

Mounting

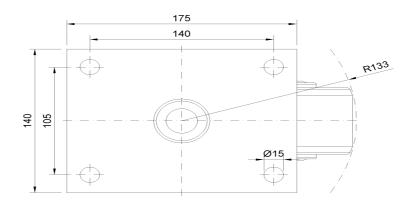

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.