1152 Anti-Friction Caster (B Type) Series

Dersheng Casters Keep Rolling

QPU (Brown flat) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11520600532061

Swivel Caster with Welded Caster Fork, blue painted finish Mounting Type - Top Plate, 129.4 x 73.8 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 3-1/2 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-1/2 " x 6-3/8 "

Bolt Hole Spacing 5-1/8"x2-7/8"

Plate Hole 9/16 " x 1-1/16 "

Offset 1-15/16 "
Swivel Interference 10-3/8 "
Overall Height 7 "
Swivel Radius 5-3/16 "
Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 2381lbs

Load Capacity (Static) 3571lbs

Temperature -4°F to +1

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 16.5lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

• •


Floor Surface Preservation • • • • •

Dimensions





Mounting

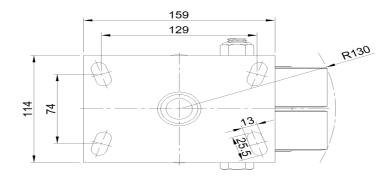

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.